





# **STAGE LIGHTING**

KHA18B--Compact Mini beam 7R 230W



Power supply:AC110V-240V 50/60hz  
 Light source: 7R 230W lamp  
 Ballast:electronic ballast  
 Housing:ABS plastic+alloy  
 Lens:3-layer option glass lesn  
 Beam angle parallel:0-3.8°  
 Channel:17ch  
 Size:31\*22\*44cm  
 G.W: 12kg  
 Prism:16 prism rotation  
 Gobo:14 gobo+blank double rotation rainbow effect  
 Color:13 color+blank,single rotation rainbow effect  
 Focus:option focus  
 Mode of control:DMX512, master-slave,sound,stand-alone,auto mode  
 Pan:540 degree(16bits)electronic correction  
 Tilt:270 degree(16bits)electronic correction  
 Pan/Tilt motors:2-phase step motor,moving smooth in the slow and fast speed  
 DMX socket:3-pin IN/OUT  
 Power socket:Powercon in  
 Display:Blue LCD display  
 Lamp:LAMP DMX ON/OFF,ignited by inverter,protect and lengthen the lifetime of the bulb

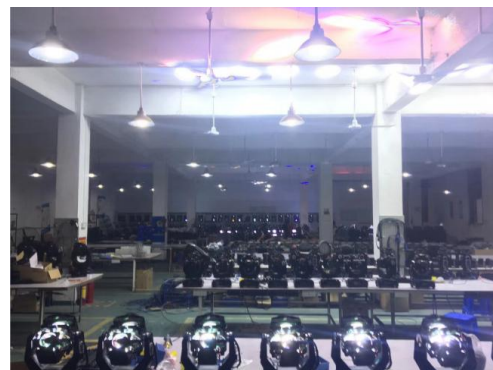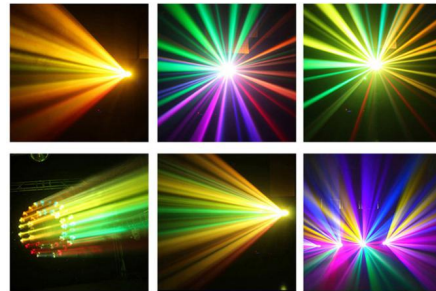

## KHA2--200W Sharpy beam moving head light



Voltage:100-240V 50/60Hz

Power: 200W

Channel:16ch

Light source: Original 5R 200W

Gobo wheel: 17 metal gobos+white

Color wheel:14 colors+white

8/16prism/24prism optional ,prism rotation

Lens : 6-layer optic glass lens

Motor : 2-phase step motors

Features: moving more smoothly and no shake . theChannel list is same with Clay Paky

Display : Roller Button screen

Cartonsize:410\*460\*510mm

Weight:22kg

flightcase:920\*500\*700mm

weight:63kg



## KHA18--230W Double prism beam moving head



Voltage:100-240V 50/60Hz

Power: 230W

Channel:17ch

Light source: OSRAM 230W

Gobo wheel: 17 metal gobos+white

Color wheel:14 colors+white

8/16prism/24prism optional ,prism rotation

Lens : 6-layer optic glass lens

Motor : 2-phase step motors

Features: moving more smoothly and no shake.

The Channel list is compatible with Clay Paky

Display : Roller Button screen

Cartonsize:410\*460\*510mm

Weight:22kg

flightcase:920\*500\*700mm

weight:63kg



Clamp



Clamp



Safety rope



Safety rope



## KHA26--Beam spot wash 3in1 350W 17R



Input: AC100v-240V 50/60HZ

Power Consumption:460w

Lamp source: YODN MSD 350w 17R

Lamp life:2000Hrs

Zoom angel:30-100(beam mode)50-400(Spot mode)

Electronic Focus:30-400

Color temperature:8000K

Control mode:DMX512/auto/master-slave

Channel:16/24ch

Net weight:20kg

Flight case size: 940\*500\*830mm(Double/CTN)

G.W.: 75kg

Colors:1color wheel with 13 fixed colors+blank,with rainbow effect

Rotating gobos:1 gobo wheel with 9 gobos+blank, indexable and replaceable "SLOT&LOCK" glass gobos + open

Static gobos:1 gobo wheel with 14 gobos+blank

Prism:6 linear prism rotating+8 prisms rotating

Dimmer:0-100% linear dimmer

Strobe:Independent strobe channel, 1-13times/s, speed adjustable

Pan=5400 Tilt=2500movement

Pan/Tilt Resolution:16bit

LCD display

3pin DMX in/out

Power input:Power con



## KHC72--3\*40W LED Wash Zoom Moving head light



Input voltage: 110 - 240 V, 50/60 Hz

Power: 150W

Light source: 3pcs 40W, RGBW 4in1 mixing color

Working lifetime: About 50000 hours

IP rating: IP20

Working temperature:-20°C-40°C

Control mode: DMX 512, Auto, Master-slave, Sound

Feature: Beam, dyeing, strobe, zoom,pixel

3pcs LED controlled individual,

360 degree continuous rotation control

Channel: 13ch /19ch/23ch

3DMX Modes: HIS (13ch)/STD (19ch)/EXT(23ch)

Zoom range:4° ~ 60°

Dimmer:0-100% dimmer

Housing material: Engineering plastics

Pan/Tilt:360 degree continuous rotation control

Net weight: 9.02kg



**KHC70--12\*40W LED Pixel Zoom Wash light**

Input voltage: 110 – 240 V, 50/60 Hz

Power: 500W

Light source: 12pcs 40W, RGBW 4in1 mixing color

Working lifetime: About 50000 hours

IP rating: IP20

Working temperature:-20°C-40°C

Control mode: DMX 512, Auto, Master-slave, Sound

4Channel mode: STD/HSI/GUI/EXT (17/11/18/58CH)

Function: Dyeing, strobe, zoom, light beam effect

Pan: 540° (16bit) Electric correction

Tilt: 270° (16bit) Electric correction


Zoom range: 7° ~ 70°

Dimmer: 0-100% dimmer

Display panel: Blue LCD screen

Housing material: Engineering plastics

Net weight: 15k

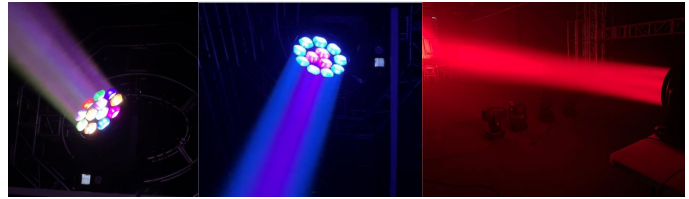

## KHC67--7\*40W RGBW Pixel Moving Head



Input voltage: 110 - 240 V, 50/60 Hz

Power: 320W

Light source: 7pcs 40W, RGBW 4in1 mixing color

Working lifetime: About 50000 hours IP rating: IP20

Working temperature: -20°C -40°C

Control mode: DMX 512, Auto, Master-slave, Sound

Channel: 17ch /12ch

2DMX Modes: STD (17ch)/ HIS (12ch)

Motor: 4

Zoom range: 4° ~ 50°

Net weight: 9.02kg

Function: Dyeing, strobe, zoom, light beam effect

Pan: 540° (16bit) Electric correction

Tilt: 270° (16bit) Electric correction

Dimmer: 0-100% dimmer

Housing material: Engineering plastics

Display panel: Blue LCD screen





**KHC33--19\*15w aura led zoom moving head light** Input

Voltage: AC90-260V 50/60Hz

Light Source: 19pcs 15w 4-IN-1 LEDs (R, G, B, W)

540° pan and 260° tilt ranges

Power Consumption: 300W

Zoom range: 8-30 degree

Motor: 3pcs

Control mode: DMX512, master-slave, Sound, Auto

Channel: 2 modes: mode1: 14CHs; mode2: 25CHs

Beam: RGBW color control with color temperature control

Aura: RGBW control

‘Color wheel’ color snap Beam and Aura effects


Motorized zoom

Smooth electronic dimming

Electronic shutter with strobe and pulse effects

Calibrated and raw modes

Net weight: 7.5kg

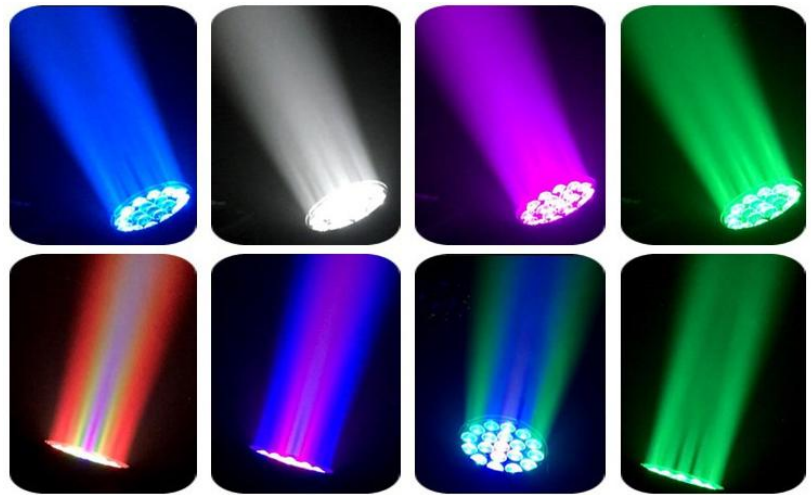

**KHC44--B-eye 19\*15w RGBW 4in1 LED Pixel Zoom Wash Light**

Power supply : 100-240V 50/60Hz

Power : 350W

LAMP SOURCE:19x15W Osram RGBW LEDs,

LED Average Life : 50,0000 h

Zoom : 4°-60° Electronic Zoom Range

Individual LED control for each parameter


3 DMX Modes : 21CH Standard , 35/78/97/92 CH Extended , 23

Pan : 540° , 16 bit

Tilt : 210° , 16 bit



- 0-100% linear electronic dimmer
- Adjustable speed stop/strobe effect, with instantaneous bla
- Three operating modes: wash, beam, FX (Kaleido effects)
- Bi-directional Rotating Front Lens
- Digital Wash-Beam Framing effect
- Beam edge softening control (in Wash mode)
- Pixel Patterning Macros with enhanced control
- DMX signal connection: 3 Pin XLR input and output
- Power Con In and Out
- Net Weight : 15KG
- Size:494\*358\*253


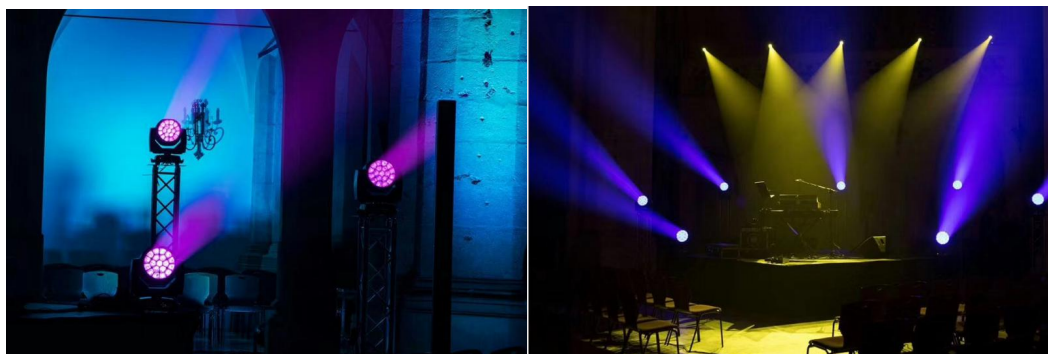


KHC59--200W led spot moving head light



Input Voltage: AC100-240V 50/60Hz  
 Power: 200W  
 Light source:1 LED white 200w,5000 hours life expectancy  
 Beam angle:16 degree  
 Color:7+white,split colors,continuous scroll at variable speeds  
 Rotation wheel:6+open(5 aluminum+1 glass)rotating,interchangeable, slot-n-lock,continuous scroll at variable speeds  
 Static wheel:8+open(8stamped) continuous scroll at variable speeds  
 Strobe rate: 0 to 15 Hz  
 DMX channel: 10 or 16  
 Control mode:DMX512, master-slave,sound,auto  
 Display:colorful LCD display  
 Cooling:efficient low noise fan cooling system  
 Power connextor: POWER CON IN/OUT  
 DMX connector:3-pin XLR conectors IN/OUT  
 Dimension:29(19.4\*43.2CM

Effect Wheels

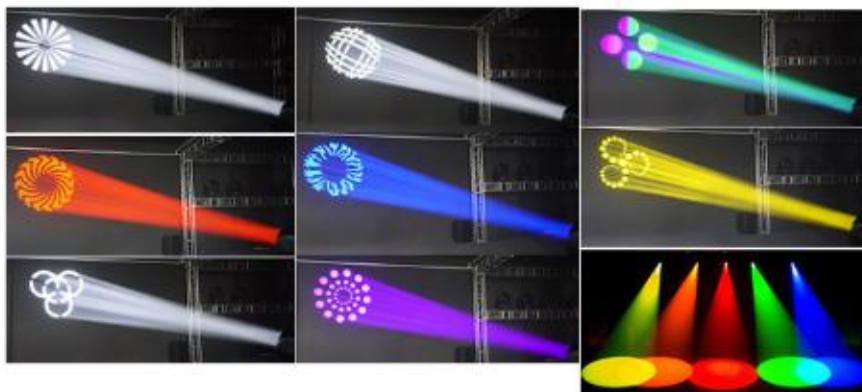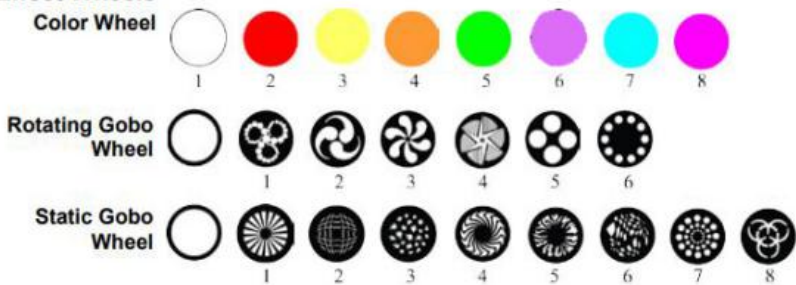

**KHC68--120W led spot moving head light**

Input Voltage: AC100-240V 50/60Hz

Power: 120W

Light Source: 1 LED (white) 120 W, 50,000 hours life expectancy

Beam Angle: 16°

Colors: 7 + white, split colors, continuous scroll at variable speeds

Rotation wheel (1): 6 + open (5 aluminum + 1 glass), rotating, interchangeable, slot-n-lock, continuous scroll at variable speeds

Static wheel (2): 8 + open (8 stamped), continuous scroll at variable speeds

Prism: 3-facet round, bidirectional rotation at variable speeds

Strobe Rate: 0 to 15 Hz

DMX Channels: 12CH/15CH

Control mode : DMX 512, master-slave , sound , Auto


Display : Colorful LCD display

Cooling : Efficient low noise fan cooling system

Power connector : POWERCON IN/ OUT

DMX connector : 3-pin XLR connectors IN/OUT



W.: 9.5Kg

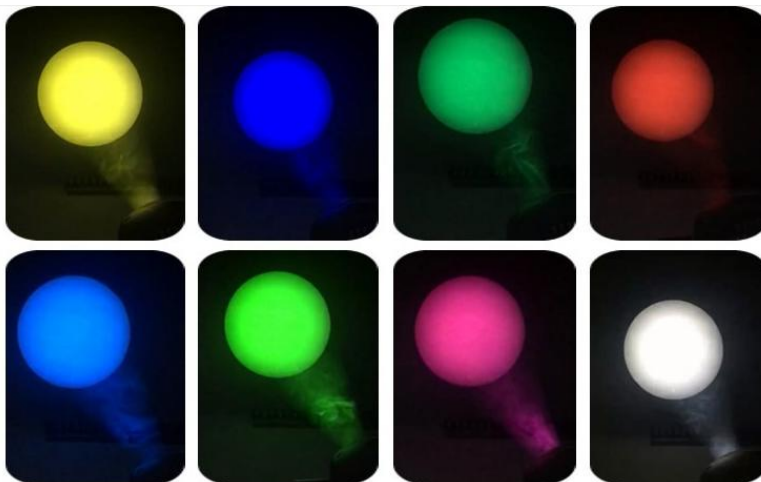

**KHC60-60W LED Beam Wash Zoom Moving Light**



Input Voltage: AC100-240V 50/60Hz  
 Power Consumption: 80W  
 Light source: 60W RGBW 4in1 LED  
 Color temperature: 2700K and 3200K  
 LED life expectancy: min,20000 hrs  
 Zoom range: 4°-28°  
 Color mixing mode RGBW  
 Strobe: Strobe effect with variable speed(0.3-20Hz)  
 Dimmer: Smooth dimmer from 0-100%  
 Prism: 3-facet rotating prism with continuous rotation in both direction  
 Effect: Flower effect, color rainbow effect, 3 facet prism 10 flower effect macros  
 Pan movement range: 540°(switchable to 360°) 16bit  
 Control mode: DMX512, master-slave, auto, sound, stans-alone  
 DMX channel: 27/21ch  
 Function: Beam, Wash, Spot, Samll and working fast  
 Product size: 290\*130\*395mm  
 Net weight: 9kg  
 Pan/Tilt: 360 degree continus rotation control

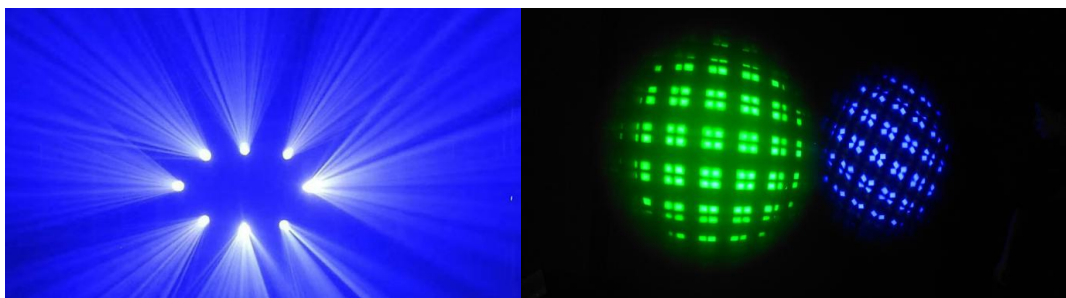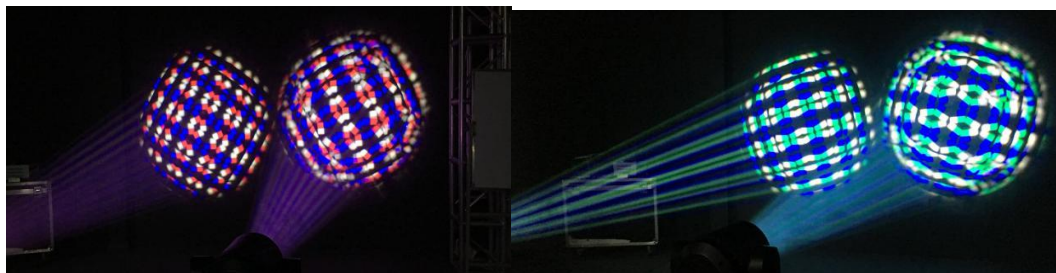

## KHC14-36\*10W RGBW led zoom moving head light

Input Voltage: AC90-260V 50/60Hz

Light source: 36pcs 10W 4-IN-1 LEDs (R, G, B, W) Power

Consumption: 360W

LED life: 60,000 hours

Control Signal: DMX512, master-slave and sound activated auto operation

Control Channel: 16/24DMX channels

Zoom range: 10-60 degree

Dimensions: 332(D)\*235(W)\*445(H)mm

Packing Dimensions:450(D)\*320(W)\*430(H)mm

Net Weight: 10kg

Gross Weight: 11.5kg

Dimmer:0-100% smooth linear dimmer with flicker free

Strobe:20t/s strobe effect with variable speed

Pre-programmed random strobe and pulse effects, Built-in programs with macro effects

High efficiency 8 degree optic lens

Color range with 16.7 millions additive RGBW colors



**KHC75--5\*15W led moving beam RGBW 4in1**

Input voltage: 110–240 V, 50/60 Hz

Power: 100W

Light source: 5pcs 15W, RGBW 4in1 mixing color

Working lifetime: About 50000 hours

IP rating: IP20

Working temperature:-20°C-40°C

Control mode: DMX 512, Auto, Master-slave, Sound

Channel: 6ch /18ch/31ch/29ch

4DMX Modes:

Motor: 4

Net weight: 7.5kg

Function: Strong lighting beam effect,limitless rotation  
X and Y

Pan: 540° (16bit) Electric correction

Tilt: 540° (16bit) Electric correction

Dimmer: 0-100% dimmer

Housing material: Engineering plastics

Display panel: Blue LCD screen

Length:42 cm

Width: 12 cm

Height: 10 cm

**KHC77--5\*40W led pixel bar moving head**

Input voltage: 110–240 V, 50/60 Hz

Power: 200W

Light source: 5PCS 40W, RGBW 4in1 mixing color

Working lifetime: About 50000 hours

IP rating: IP20

Working temperature:-20°C-40°C

Control mode: DMX 512, Auto, Master-slave, Sound

Channel: 15ch/31ch

4DMX Modes:

Motor: 4

Net weight: 9kg



KHE21--10\*30W RGBW LED zoom bar moving head




LED life expectancy: min. 20.000 hrs  
 Zoom range: 3° - 60°  
 Light output: 8,000 lx @ 5m  
 Colour mixing mode RGBW  
 PIXEL MAPPING  
 Motorized zoom  
 Shutter: Max 10Hz electronically  
 High resolution electronic dimming: 0 - 100%  
 DMX Protocol modes: 7  
 COMP/HIRES/DPIX/DPIXH/SPIX/SPIXH/NORM  
 (33CH/19CH/34CH/48CH/49CH/28CH/29CH)  
 8 or 16 bit for Tilt /RGBW /Zoom/ Dimmer  
 Tiltmovement range 210°  
 Automatic Tilt position correction  
 Power in/out connector: powerCON in/out  
 DMX in/out: 3-pin XLR  
 Gross weight:11kg





## KHE28--18\*40W RBWA LED Zoom Bar moving head

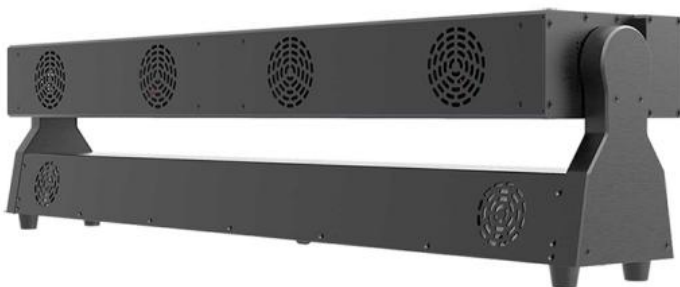

Power consumption: 600 W at 230 V / 50 Hz

LED Source: 18x 40W RGBW LED multichips

Channel: 34, 56, 97, 115, 110, 128

Zoom range: 4° - 45°

LED life expectancy: min. 20.000 hours

Colour mixing mode RGBW

Individual control of each RGBW pixel

Variable CTO: 2.700K - 8.000K

2x MCFE™ - Multi-Coloured Flower Effects - creating spectacular multicolour beam effects in the air rotating in both directions at variable speed (patent pending), pixel control, virtual colour wheel, tungsten lamp effect

Motorized zoom

2 independent zoom zones

Pre-programmed random strobe & pulse effects

Electronic strobe effect with variable speed up to 20 Hz

High resolution electronic dimming: 0 - 100%

RGBW : 8 or 16 bit

Zoom: 8 or 16 bit

Dimmer: 8 or 16 bit (internal 18 bit)

Tilt movement: 205°

16 bit movement resolution

Controllable speed of Pan/Tilt movement

Power in/out connector: Neutrik powerCON TRUE1 in/out

DMX and RDM data in/out: Locking 5-pin/3-pin XLR

Ethernet port in/out: RJ45

**KHE21--1440PCS RGB LED Strobe Bar**

Light source: 1440pcs 0.2w RGB LED

LED life expectancy: min. 60.000 hrs

Optical System

Light output: 290W

Electromechanical Effects

Colour mixing mode RGB

Variable CTO:6.000K

Virtual Colour Wheel: virtual colour wheel with presets

Shutter: Electronic with variable speed strobe

High resolution electronic dimming: 0 - 100%

Control and Programming

DMX Protocol modes: 6

Control channels:

3CH/5CH/48CH/50CH/11CH /56CH

Electrical /THERMAL

Input voltage range: 100-240 V, 50/60 Hz

Power in/out connector: powerCON in/out

DMX in/out: 3-pin XLR

-5°C-45 °C (23°F-104 °F)


Dimmer: linear 0~100% electronic dimmer

Dimmer curves:3 different dimming curves available

Mechanical Specification

Height: 992 mm (39.1") - head in vertical position

Width: 109 mm (4.3")



## KHH28--Hybrid LED Strobe moving head light



Voltage: AC110-240V, 50/60HZ

Consumption: 4800W

Light source: 1320pcs 0.2w RGB LED +216pcs 1w cool white

Channel: 14CH/23CH/17CH/62CH/68CH

#### Strobe panel LEDs

LED Count: 1320

LED Colors: RGB

LED Segments:12(2x6)

#### Strobe tube LEDs

LED Count: 216

LED Colors: Cool white

LED Segments: 12

Resolution: 8 - 16 bit

Position feedback: Yes

Tilt: 185 °

Power connector: PowerCON IN/ OUT

Signal connection: 3-pin XLR connectors IN/OUT

Signal connection: 5-pin XLR connectors IN/OUT


Signal connection: Artnet RJ45 IN/OUT

Height: 570mm- head in vertical position

Width:226.5 mm

Depth:291.2mm

N.W:12.5kg

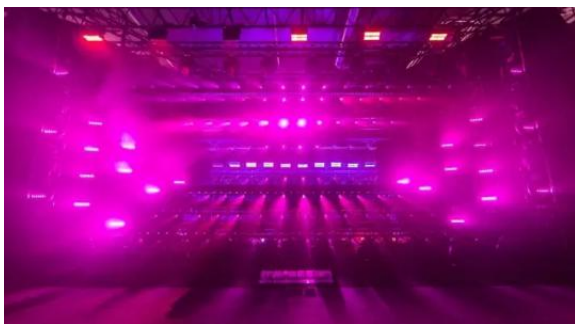

Mini KHC80-60W battery LED Spot moving head light



Input voltage: 110 - 240 V, 50/60 Hz

Power: 100W

LEDs: 60W white

Beam angle: 16 degree

DMX channel: 11/14CHs

Control Mode:DMX512/Wireless/master-slave/sound/auto

Colors wheel:7colors+white

Goboe wheel:6gobos + white

Prism:3facet prism

**Battery details:**


Battery in the Base which is Lithium Battery, 12V, 25Ah.

Charging time to full : 6hours



Battery using time : 4.5hours

Display:

Battery charging and status all showed on LCD Display.Wireless receiver inside the lights

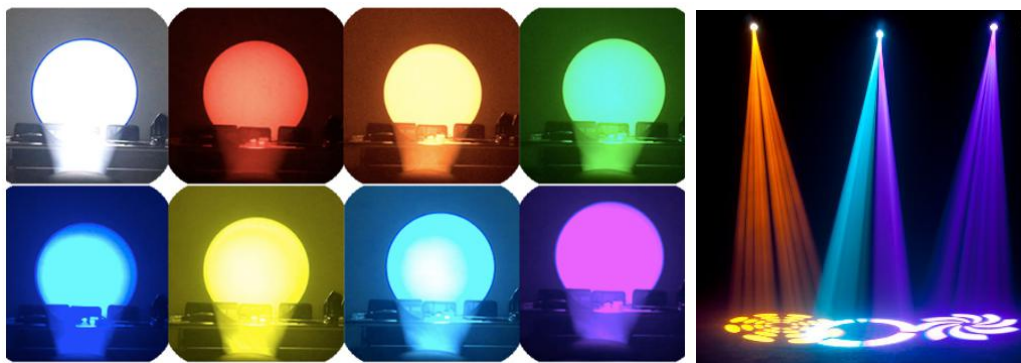

## KHK37--25pcs \* 10W COB LED Warm White++25\*16pcs\*0.2WLED RGB 3in1

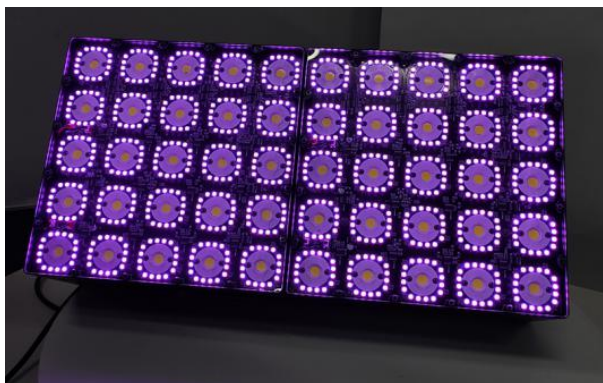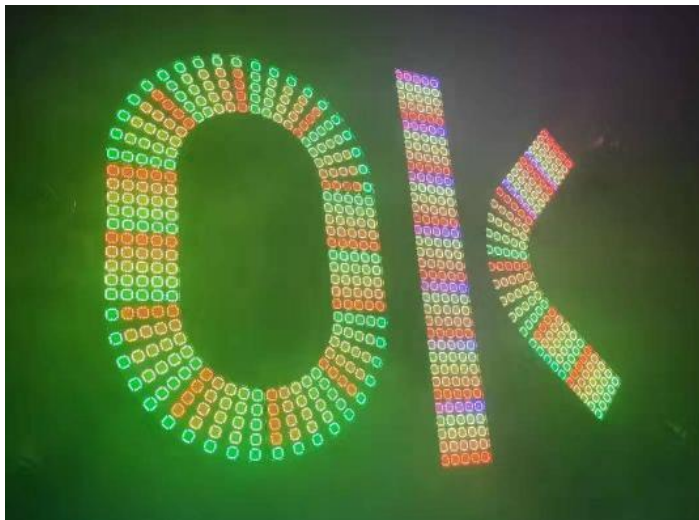

Voltage : AC 100V-240V 50-60Hz

Power consumption:350W

Light source : 25pcs \* 10W COB LED Warm White

+25\*16pcs\*0.2WLED RGB 3in1

LED light time Output:over 50000 hours

Angle of light : 150degree

Channel: 112/100/12/6/4CH

Dimmer:0-100% linear adjustable

Strobe : Variable speed (1-30Hz)

Feature : Matrix effect , strobe , 25pcs LED controlled individual .

around COB each 16pcs 0.2w LED controlled individual.

Housing material : Metal

Housing color : black

Control mode : DMX512 , Master / Slave , Auto , Sound active

Working temperature:-30C --40C

IP Rating:IP20


Cooling:waterproof fan+die-casting aluminum

Length:28 cm

Width: 10 cm

Height: 28 cm , head in vertical position

W: 6KG

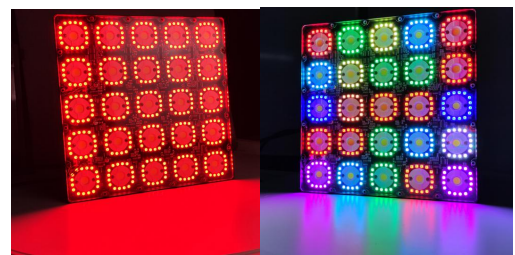

KHE26--9\*10W 6in1 waterproof LED battery wall wash light



Power Supply: AC 100-240V/50-60Hz

Power consumption: 90W

Light source: 9pcs LED RGBWA+UV 6in1 mixing color

Beam Angle: 15°

Dimmer: 0-100% dimmer

Strobe rate:0-24HZ

Working Environment: -20℃-40℃

IP rate: IP54,outdoor

DMX Channels: 2 DMX modes, 6channels mode & 10 channels mode

Control Mode:

DMX512,Master-slave,Sound,Auto,Wireless,Wifi,

Remote

Battery:

Battery type: Lithium Ion

Battery Charge Time: 6 hours(full power)

Battery Life: (all on) 4hours, (single Color) 24hours

Battery Power: 12V, 25Ah

Wireless effective distance: 400meters


Product size: 647\*104.9\*209mm

Net weight: 8.89kg

KHD67-7\*10W RGBW/RGBWA+UV Mini Par IP65



Voltage: AC100-240V  
Frequency: 50Hz-60Hz  
Consumption: 56W  
Lamp: 7pcs\*10W RGBW 4in1 LED  
Channel: 4/8CH  
IP rate: IP65  
Mode of control: DMX512, Auto, Sound, Master-slave.  
Function: Can make magic, color mixed, charming effect  
Net weight: 3.1KG

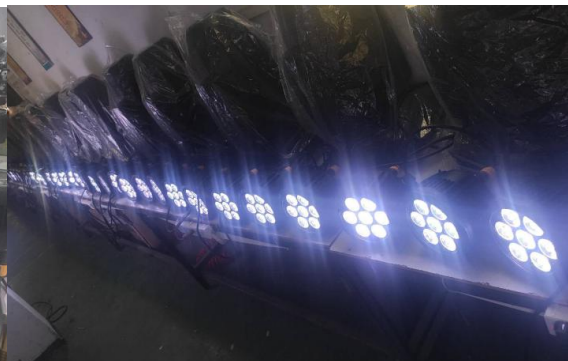

## KHD68--Waterproof Zoom Par 7x30W RGBW+96x0.2W UV



Input Voltage:AC90-260V50/60Hz  
Light Source: 7pcs 30w 4-IN-1 LEDs (R. G. B. W)  
+96pcsx0.2w UV SMD  
Power Consumption:280W  
Zoom range:3-60degree  
Zoom Motor:2pcs  
Control mode:DMX512, master-slave, Sound, Auto  
Life time:60000hours  
0-100% smoothly dimmer  
20t/s strobe effect with variable speed  
IP65 protection rating  
Seetronic Power In/out  
3-Pin XLR DMX input/output







KHD45--9\*10W 6in1 led battery par light




Power Supply: AC 100-240V/50-60Hz  
 Power consumption: 90W  
 Light source: 9pcs LED RGBWA+UV 6in1 mixing color  
 Beam Angle: 15°  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 Working Environment: -20°C-40°C  
 IP rate: IP20,indoor  
 DMX Channels: 2 DMX modes, 6channels mode & 10 channels mode  
 Control Mode:  
 DMX512,Master-slave,Sound,Auto,Wireless  
 Battery:  
 Battery type: Lithium Ion  
 Battery Charge Time: 6 hours(full power)  
 Battery Life: (all on) 4hours, (single LED) 24hours  
 Battery Power: 12V, 25Ah  
 Wireless effective distance: 400meters  
 Net weight: 4.5kg

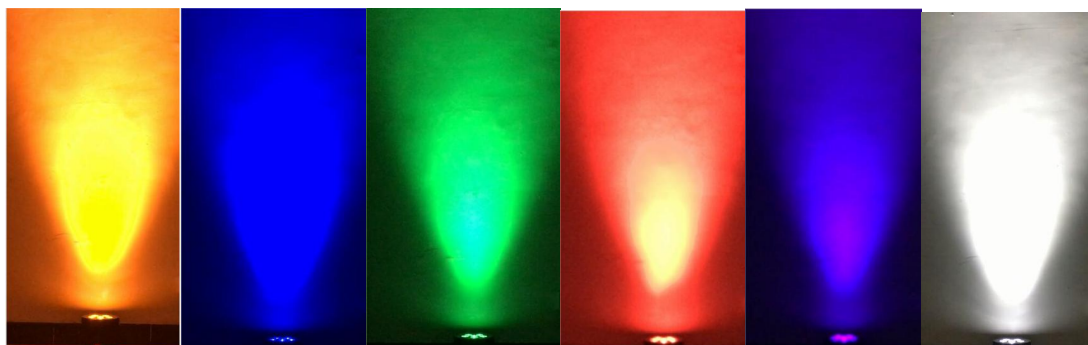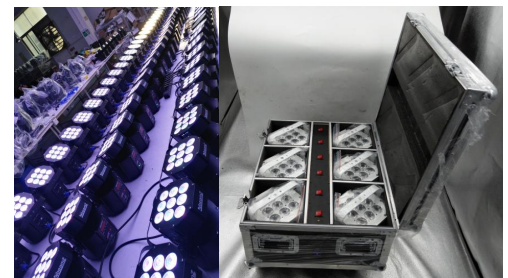

KHD50--4\*12W RGBWA+UV 6in1 led battery par light



Power Supply: AC 100-240V/50-60Hz  
 Power consumption: 80W  
 Light source: 4 \* 12 W RGBWA+UV 6in1 LED  
 Beam Angle: 15°  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 Working Environment: -20°C-40°C  
 IP rate: IP20,indoor  
 DMX Channels: 2 DMX modes, 6channels mode & 10 channels mode  
 Control Mode:  
 DMX512,Master-slave,Sound,Auto,Wireless,Wifi, Remote  
 Battery:  
 Battery type: Lithium Ion  
 Battery Charge Time: 3 hours(full power)  
 Battery Life: (all on) 6hours, (single Color) 36hours  
 Battery Power: 12V, 10Ah  
 Wireless effective distance: 400meters  
 Product size: 140\*140\*200mm  
 Net weight: 2.4kg

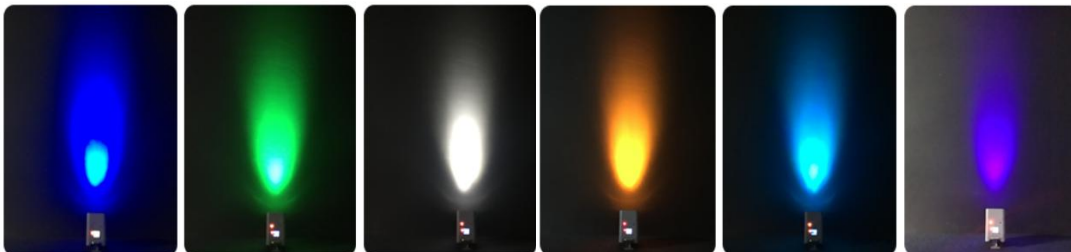

KHD53-3\*8W RGB/RGBW LED battery truss par



Power Supply: AC 100-240V/50-60Hz  
 Power consumption: 25W  
 Light source: 3pcs\*8w LED RGB 3in1 mixing color  
 Beam Angle: 10/25 degree  
 Dimmer: 0-100% dimmer  
 Strobe rate:0-24HZ  
 Working Environment: -20°C-40°C  
 IP rate: IP20  
 DMX Channels: 7 channels  
 Control Mode:  
 DMX512,Master-slave,Sound,Auto ,remote  
 Remote: IRC remote  
 Battery type: Lithium Ion  
 Battery Charge Time: 6hours(full power)  
 Battery Life: (all on) 8hours, (single Color) 24hours  
 Battery Power:12 V, 6Ah  
 IEC power In/Out(charging)  
 DMX control, 3pin In/Out  
 Indicator light:  
 Charging: Red  
 Charging full: Green  
 Using/Turn off: still on Green (control by battery)





For triangular truss



**KHD49--19\*15W RGBW LED Zoom Par light**

Input Voltage: AC90-260V 50/60Hz  
 Light Source: 19pcs 15w 4-IN-1 LEDs (R, G, B, W)  
 Power Consumption:285W  
 Zoom range:15-60degree  
 Control mode:DMX512, master-slave, Sound, Auto  
 Channel: 5 modes: mode1: 32CHs; mode2: 16CHs; mode3:10CHs; mode4:5CHs; mode5: 32CHs  
 Life time:60000hours  
 Net weight:2.8kg  
 Packing size: 280\*280\*390mm( 1pcs/CTN)  
 Specification:  
 With both wash and beam effect, 3 LED zones with individual control of each  
 Built-in Master/Slave mode to show software  
 0-100% smoothly dimmer  
 20t/s strobe effect with variable speed  
 Low noise and efficient FAN cooling system  
 IP20 protection rating  
 3-Pin XLR DMX input/output  
 The lighting for stage, theatre, TV studio, rental, DISCO and more

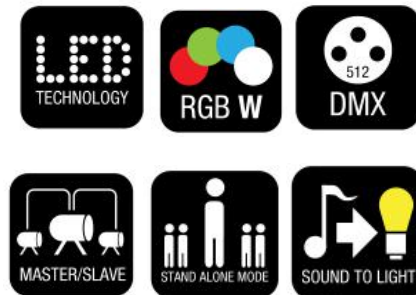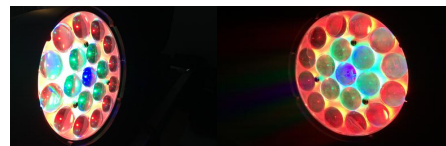

KHD59--18\*10W RGBW LED flat par light



Voltage:90-260V 50/60Hz

Power:180W

Light source: 18x 10W 4 in 1 LED

LED life: 50, 000 hours.


Lens degree: 15 ° 25 ° , 45 ° (optional)

DMX channel :4/8CH

Control Mode: Auto , Sound , DMX512 , Master-slave

Strobe: 0 ~ 20 times / sec.

IP Rate : IP20

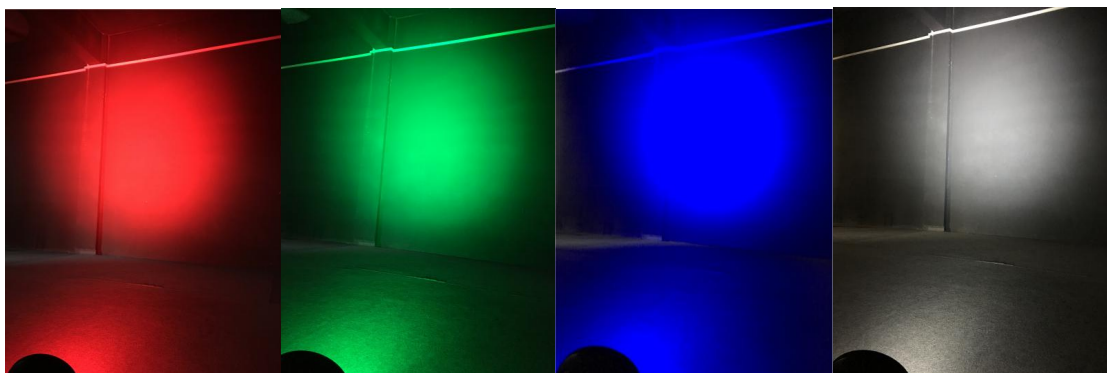

## KHD54--100W COB IP20/IP54 Zoom WW PAR LIGHT



Light Source: 1 x 100W WW/CW LED module

Color Temperature: 3000K/ 5700K

Beam Angle: 9° /15° /20° /25° /30°

Control

DMX channel: 2 channel

Control Mode: DMX512,Manual

Firmware Upgrade: Update via DMX link

Construction

Data In/Out: 3-pin XLR

Power In/Out: Power cord out

Protection Rating: IP54

Features

CRI  $\geq$ 90

High brightness, energy saving, can replace the traditional 1000W Par lights

9° /15° /20° /25° /30° angle can be manually switched



## KHD34--200W COB WW LED PAR LIGHT



Power: 250W

Light source: 1pcs white 200w COB LED

LED Life Time: over 50000hours

IP Grade: IP20

Environment Temperature: -30° ~45°

Housing Color: Black

Light body: Die-casting Aluminum

With barndoor

Dimmer: 0~100% linearly adjustable

Control Mode: DMX512/Master-slave/Sound activated/Auto mode

Channel: 1/2/3CH

LED angle: 60°

Setting and Addressing: 4-digit

LED Cooling: Forced Air Convection, with 1 Fan


Fan Noise: 12.1~20dB

Fan speed: 900-2,000RPM  $\pm$  10%

Technology: Thermal management system ensures long life of LED

Refresh rate: 4000Hz, flick free for TV and Studio

Packing Size:56\*56\*42cm(4pcs/case)

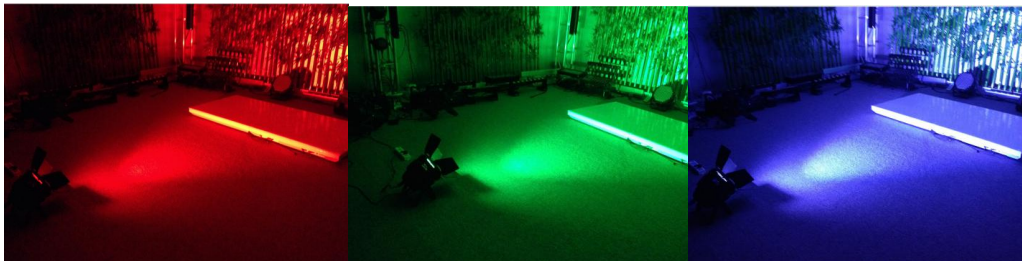

KHD6-18\*10W RGBW LED PAR LIGHT



Voltage:90-260V 50/60Hz  
Power:200W  
Channel:7ch  
Light source: 18x 10W 4 in 1 Tianxin LED  
LED life: 50, 000 hours.  
Lens degree: 15 ° 25 ° , 45 ° .  
DMX channel :8CH  
Control Mode: Auto , Sound , DMX512 ,  
Master-slave  
Strobe: 0 ~ 20 times / sec.  
IP Rate : IP20  
Size: 310\*310\*360mm.  
Weight: 4.5kg.





**KHD6--18\*15W RGBWA+UV 6in1 Zoom Par light**

Input voltage: A C 100-240V, 50-60Hz

18pcs of 15W 6-IN-1 high power LED

Beam Angle:25 degree

Zoom : 20-60 degree

Channel : 6/10 CH

Life Time: 50,000 hours

Dimmer: 0-100% with regulated constant color control

Strobe: 10 Flashes per second (any color) Control

panel: 4 Digital LED display figures

Waterproof rate: IP20

Cover: Aluminum

Maximum Ambient Temperature: 45 ° C

Packing size: 25x25x38 mm

N.W./G.W. : 4kg/5kg



KHD17B--18\*10W RGBW waterproof LED Flar par light



Voltage: AC100-240V  
Frequency: 50Hz-60Hz  
Consumption: 200W  
Lamp: 18pcs 10W RGBW 4in1 LED lamp  
Channel: 4CH/7CH  
IP rate: IP65  
Mode of control: DMX512 control, Auto, Master-slave  
Function: Can make magic, color mixed, charming effect  
Gross weight: 4.7KG



KHD17C--18\*18W RGBWA+UV 6in1 IP65 Flat led par



Voltage: AC100-240V

Frequency: 50Hz-60Hz

Consumption: 200W

Lamp: 18pcs 18W RGBWA+UV 6in1 LED lamp

Channel: 6CH/9CH

IP rate: IP65

Mode of control: DMX512 control, Auto, Master-slave

Function: Can make magic, color mixed, charming effect



Gross weight: 6.8KG



KHD43D-7\*12W 6in1 Battery waterproof LED par light



Power supply:AC100~240V / 50~60Hz  
 Power consumption:105W  
 Light source: 7PCS 12W RGBWA+UV 6in1 mixing color  
 Beam angle: 25 degree  
 Dimmer:0-100% dimmer  
 Strobe rate:0-24HZ  
 Working environment:-20-40  
 IP rate:IP54  
 DMX channel: 2 DMX mode ,6channel mode and 10channel mode  
 Control mode:  
 DMX512, master-slave, sound, auto, wireless remote  
 Battery type: Lithium Ion  
 Battery charge time: 3 hours(full power)  
 Battery life: 3-4 hours all on 10 hours single color  
 Wireless effective distance:400 meters  
 N.W: 5.1kg

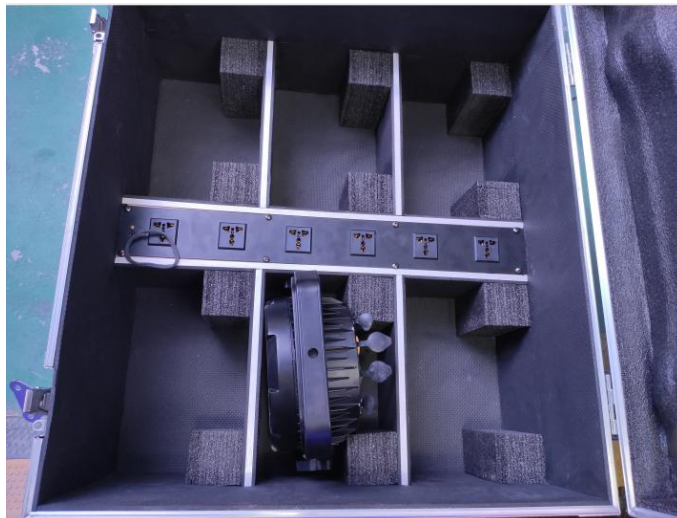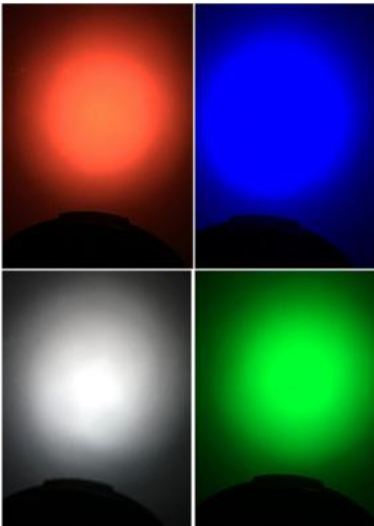

KHD43H--12\*10W 6in1 waterproof led par light



Voltage: AC100-240V

Frequency: 50Hz-60Hz

Consumption: 120W

LED: 12pcs 10W RGBWA+UV 6 in1 LED

Channel: 6CH/10CH

IP rate: IP54

Mode of control: DMX512, Auto , Master-slave

Function: Can make magic, color mixed, charming effect

Battery Charge Time: 4 hours(full power)

Battery Life: (all on) 5hours

Size:320x210x245mm


N.W: 5.06kg



KHD43--18\*12W Waterproof 5in1 LED par light




Voltage: AC100-240V  
Frequency: 50Hz-60Hz  
Consumption: 180W  
LED: 18pcs 12W RGBWA 5 in1 LED  
Channel: 9CH  
IP rate: IP65  
Mode of control: DMX512, Auto, Master-slave,sound  
Function: Can make magic, color mixed, charming effect  
Size:31\*23\*29cm  
Net weight: 7.54kg

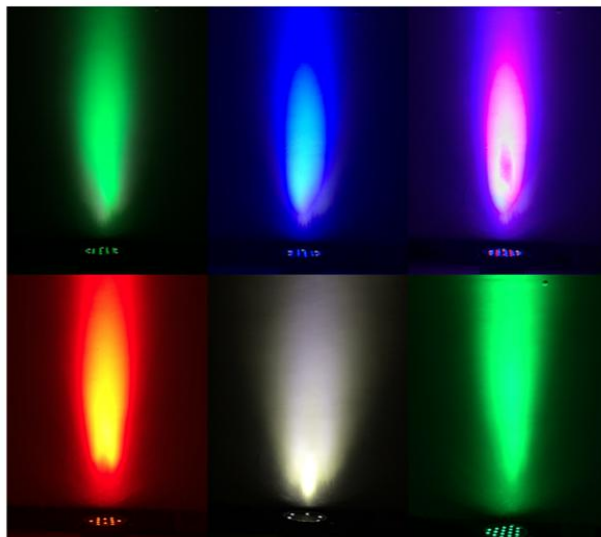

KHD64--4PCS 50W COB LED WW/CW Par Light



LED: 4pcs\*50W COB LED  
Light Color : WW/CM  
LED light time :over 50000 hours  
Voltage : AC 100V-240V 50-60Hz  
Power consumption :200W  
Dimmer : 0-100% linear adjustable  
Power input : Powercon IN &OUT  
Housing material : Metal  
Housing color : black  
Control mode : Auto , Sound,DMX512 ,  
Master-slave  
DMX Channel : 8 CH  
Working temperature : -30C ° -- 40 C °  
IP rate : IP20

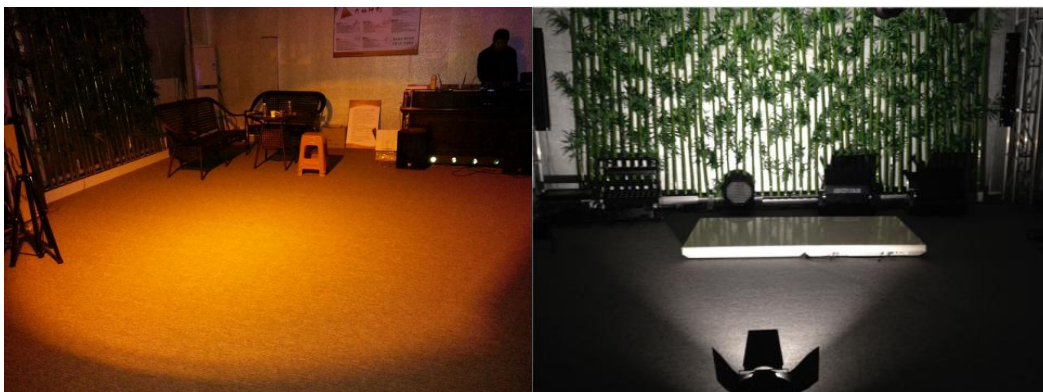

## KHK28--4\*100W COB WW LED Blinder



LED: 4pcs\*100W COB LED  
Light Color : Single color WW(100W)  
LED light time :over 50000 hours  
Voltage : AC 100V-240V 50-60Hz  
Power consumption :520W  
Beam angle : 30 degree  
Dimmer : 0-100% linear adjustable  
Strobe : Variable speed (1-30Hz)  
Color effect feature : with individual control effect  
Power input : powercon IN &OUT  
Housing material : Metal  
Housing color : black  
Control mode : DMX512 , Master/Slave , Auto , Sound alone , Sound active  
DMX Channel :1/2/ 4/8 CH  
Working temperature : -30C ° -- 40 C °  
IP rate : IP20





## KHK29-- LED COB BLINDER 2-100 WW



LED: 2pcs\*100W COB LED

Light Color : Single color WW(100W)

LED light time :over 50000 hours

Voltage : AC 100V-240V 50-60Hz

Power consumption :260W

Beam angle : 30 degree

Dimmer : 0-100% linear adjustable

Strobe : Variable speed (1-30Hz)

Refresh rate : 11700Hz , 100% flicker free for film and TV camera

Color effect feature : with individual control effect

Power input : powercorn connector

Housing material : Metal

Housing color : black

Control mode : DMX512 , Master/Slave , Auto ,

Sound alone , Sound active

DMX Channel : 2/5 CH

Working environment :

Working temperature : -30C ° -- 40 C °

Cooling : two low noise fans


IP rate : IP20



KHJ11--LED CITY COLOR LIGHT 60PCS 10W RGBW



Voltage: 100-240V 50-60Hz  
Power Draw: 600W  
LEDs : 60pcs 10W RGBW 4-IN-1 LED  
Beam Angle:40°  
Control mode: 512DMX, Master-slave, Auto  
DMXChannel:4/6/9CH  
Dimmer: 0-100% with regulated constant color control  
Strobe: 10 Flashes per second (any color)  
Waterproof rate: IP65  
Cover: Aluminum  
Net weight: 15KG  
Colors: RGBW color Mixing

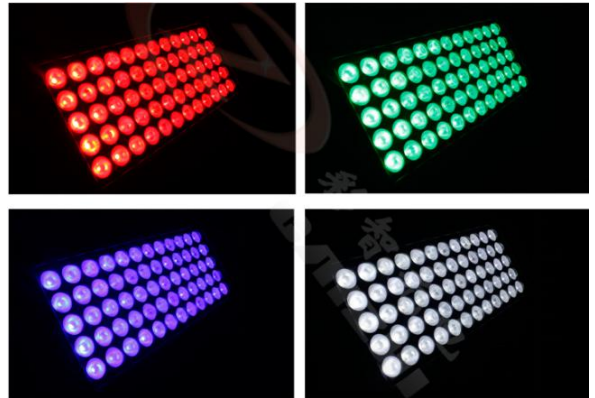

Mountain lighting



**KHJ12-44\*10W RGBW LED City Color Light**



Voltage: 100-240V 50-60Hz

Power Draw: 440W

LEDs :44pcs 10W RGBW 4-IN-1 LED

Beam Angle:40°

Control mode: 512DMX, Master-slave, Auto

DMXChannel:4/8CH

Dimmer: 0-100% with regulated constant color control



Strobe: 10 Flashes per second (any color)

Waterproof rate: IP65

Cover: Aluminum

Net weight: 11.5KG

Colors: RGBW color Mixing

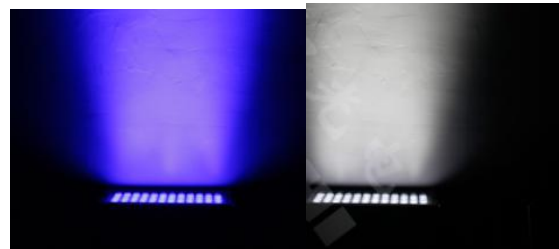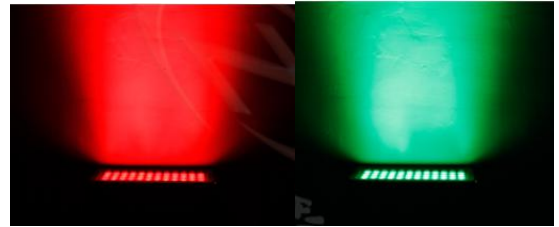

## KHE20--18\*10W RGBW IP65 LED wall wash light



Voltage: 100-240V 50-60Hz

Power Draw: 200W

LEDs : 18pcs 10W RGBW 4-IN-1 LED

Beam Angle:40°

Control mode: 512DMX, Master-slave, Auto

Feature: each led controlled individual, point control

Lens angle: 25/30/45 degree optional

Life Time: 50,000 hours

DMXChannel:9/27/82CH/72CH

Dimmer: 0-100% with regulated constant color control

Strobe: 10 Flashes per second (any color)


Waterproof rate: IP65

Cover: Aluminum

Net weight: 7.5KG

Colors: RGBW color Mixing



Packing size: 111\*15\*21CM

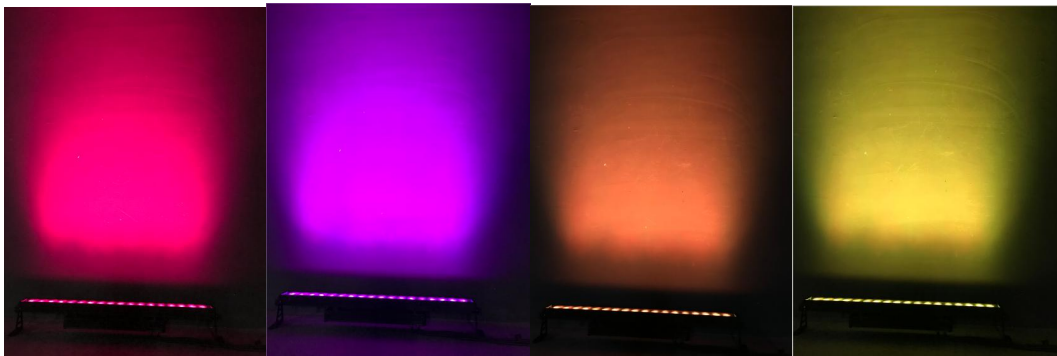

KHE20A--24\*10W 6in1 waterproof LED wall wash light



Input voltage: A C 100-240V, 50-60Hz  
Light source: 24pcs 10W RGBWA+UV  
6-IN-1 LED  
Power : 360w  
Channel : 6/910CH  
Control mode: DMX512, Master-slave, auto,  
sound  
Lens angle: 25/30/45 degree optional  
Life Time: 50,000 hours  
Dimmer: 0-100% with regulated constant  
color control  
Strobe: 10 Flashes per second (any color)  
Waterproof rate: IP65  
Casing: Aluminum Alloy Casing  
Net weight: 7.5kg  
Packing size: 1150x385x500 mm  
(4pcs/CTN)

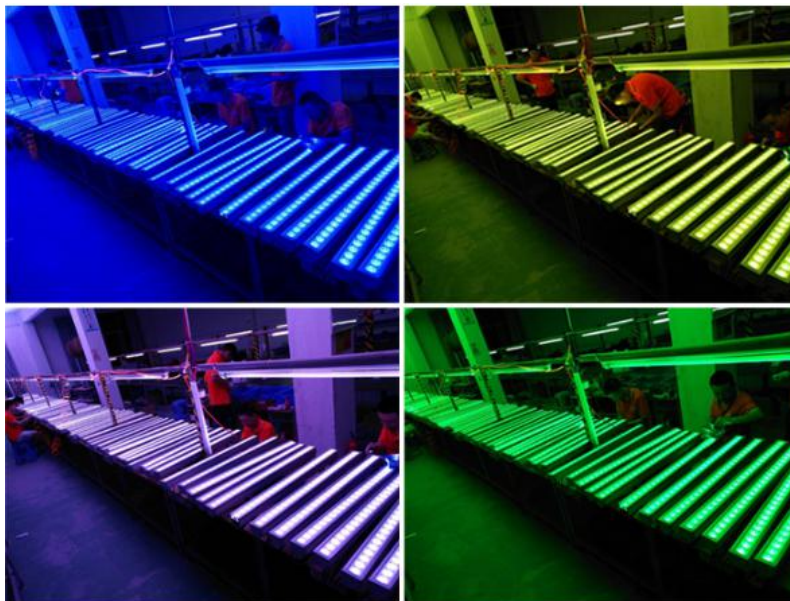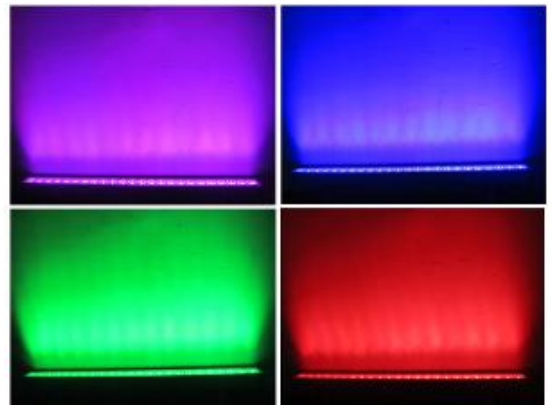

KHE22--Battery Pixel LED BAR 24\*3W RGB/RGBW IR



Power Supply: AC100-240V/50-56Hz

Power : 80w

Light source: 24pcs\*3w LED RGBW 4IN1

Beam Angle: 10° , 20° , 25°

Dimmer: 0-100% dimmer

Strobe rate: 0-24hz

Working Environment: 20-40°C

IP rate: IP20

DMX Channels: 2channels

Control mode: DMX512 master-slave,Sound, Auto,Remote

Battery type: Lithium Ion


Battery Charge Time; 6 Hours

Bettery Life: All on 8 Hours, Single Color 24hours

Battery Power: 12v 6Ah

IEC power in/out(Charging)

DMX control: 3 pin in /out

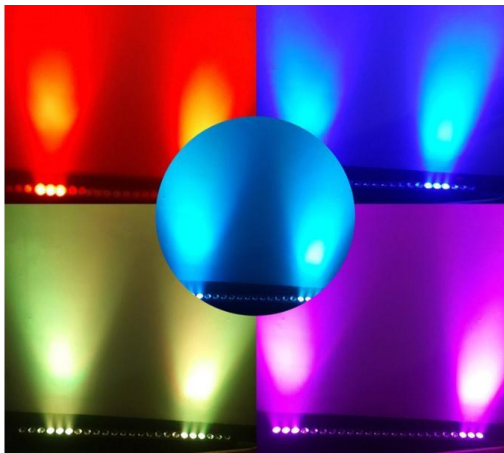

KHE22A--24\*3W RGBW led battery wireless wall wash light IR




Power Supply: AC100-240V/50-56Hz  
Power : 80w  
Light source: 24pcs\*3w LED RGBW 4IN1  
Beam Angle: 10° , 20° , 25°  
Dimmer: 0-100% dimmer  
Strobe rate: 0-24hz  
Working Environment: 20-40°C  
IP rate: IP20  
DMX Channels:6/8/14/50ch  
Control mode: DMX512 master-slave,Sound, Auto,Remote, wireless DMX  
Battery type: Lithium Ion  
Battery Charge Time; 6 Hours  
Bettery Life: All on 8 Hours, Single Color 24hours  
Battery Power: 12v 6Ah  
PowerCon in/out(Charging)  
DMX control: 3 pin in /out



KHE18--24\*3W RGB 3in1/RGBW 4in1 led bar indoor



Power input : 100-256V AC 50-60Hz  
Power : 85W  
LED: 24pcs 3W RGBW 3in1 LED  
7 Channel mode : 1/3/4/6/7/12/24 CH  
Beam angle : 25 degree  
Control mode: master-slave , sound mode , auto run , DMX mode  
3 pin XLR female and male socket  
Build-in more than 9 inner programs  
Generate endless effects with built-in, automated programs  
Create dazzling effects with 4 zones and 6 zones of individual control  
generate eye-catching chase and runway effects with built-in, automated and sound-activated programs  
Control panel : LCD display  
Black aluminum material

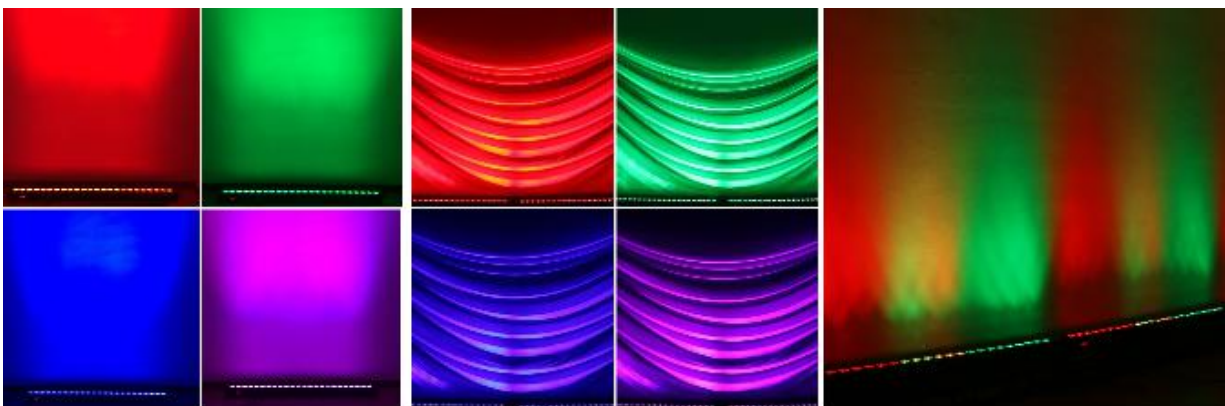



KHE18--18\*10W RGBW/RGBWA/RGBWA+UV indoor Pixel wash



Voltage: AC90V-245V/50-60Hz

Power: 200W

Beam angle: 15° or 40°

Produce more than 1600 thousand colors

Leds: 18pcs 10W RGBW 4IN1 LEDS

Life time: >100 thousand hours

Color: RGBW Wcolor can be mixed to more than 16.7million kinds of color

function effect: dimmer, strobe, eotic, gradual change


0-100% dimming function with various strobe and speed can be adjusted

Control: DMX512, Master-slave, stand-alone,sound-active

DMX Channel:9/23/72CHS

Item size: 111\*18\*23CM

weight: 6.7kg

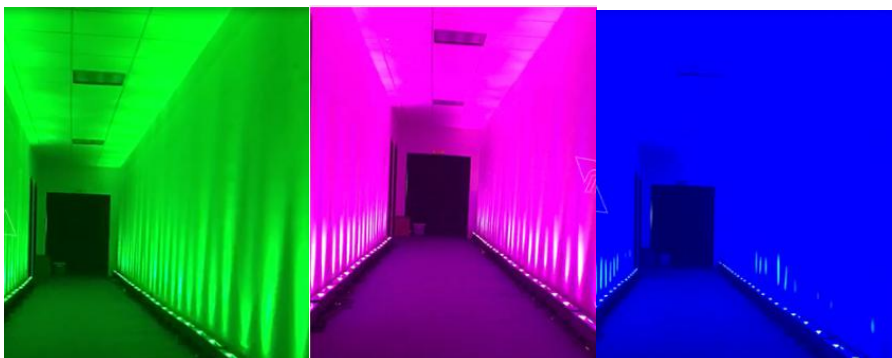

**KHH26--944PCS LED Strobe Light**

Voltage: AC100-240V, 47HZ-63HZ

Consumption: 232W

Light source: 800pcs 0.2w RGB 3in1 LEDs + 144pcs 0.5w cool white

Channel: 4CH /6CH /9CH/12CH/32CH/44CH

Mode of control: DMX512,Master-slave,Sound,Auto

Strobe: 0-20/s

IP rate:IP20

Display Panel : LED Blue Display

Housing material : Black Aluminum shell

3-pin DMX In and Out

Power Connector: powerCON in/out

Size : 51\*26\*24cm(L/W/H)

Net weight: 6.54kgs



## KHK35--LED COB battery bar 4



LED: 4pcs\*7W COB LED

Light Color : Single color WW

Voltage : AC 100V-240V 50-60Hz

Power consumption :30W

Dimmer : 0-100% linear adjustable

Power input : powercon IN &OUT

Housing material : Metal

Housing color : black

Control mode : DMX512 , Master/Slave , Auto , Sound alone ,  
Sound active

DMX Channel :5 CH

Working temperature : -30C ° -- 40 C °

IP rate : IP20

Control panel : LCD display

Product size: 600x65x240mm

Net weight:3.17kg

Battery type: Lithium Ion

Battery lifespan: 500times circulation

Battery Charge Time: 5hours(full power)

Battery Life: (all on) more than12 hours



Battery Power: 12.6V, 11Ah



KHK30--Waterproof LED Blinder 4\*100W COB WW



Input Voltage: AC100-240V 50-60Hz  
Power: 415W  
LED: 4pcs100w warm white COB LED  
Beam angle: 50degrees  
Field angle: 80degrees  
Strobe: 1-30Hz  
Dimming  
DMXchannel: 4/8ch  
IP Rating: IP65  
Cooling: Waterproof fan+ die- casting aluminum  
Net weight: 6KG

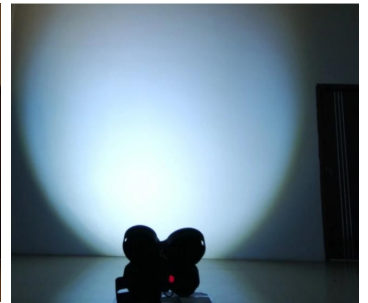

## KHF75--8\*10W WW LED bar



AC 100-240V 50/60Hz

Power consumption: 100W

LED : 8pcs 10W warm white LED , 50,000 hours

Beam angle:40°

DMX 512 protocol, master/slave, auto , sound

2/4/8 DMX channel modes

LCD display

PowerCon in & out

DMX in & out

DMX in & out



## KHE25--96\*3W RGBA 4in1 LED wash light



Power input : 100-256V AC 50-60Hz

Power : 300W

LED: 96pcs 3W RGBA 4in1 LED

Channel mode : 4/6/16/25 CH

Beam angle : 25 degree

Control mode: master-slave, sound mode, auto run, DMX mode

3 pin XLR female and male socket

Build-in more than 9 inner programs

Generate endless effects with built-in, automated programs

Create dazzling effects with 4 zones and 6 zones of individual control

Control panel : LCD display

Black aluminum material