

NELUX ARCHITECTURAL LIGHTING

CATALOG 2022



OUTDOOR LIGHTING I

LED UNDERGROUND LIGHT page 1 to page 5

OUTDOOR LED WALL LIGHT page 6 to page 9


LED FLOOD LIGHT page 10 to page 21

OUTDOOR LED STEP LIGHT page 22

● 6000K ● 5000K ● 4000K ● 3000K ● 2700K



UG3001




TECHNICAL PARAMETER

Model:UG3001
 Rated power:3W/3*2W/COB6W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum,Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size (mm):Φ100*H80MM
 Hole Size(mm):Φ95




UG3002

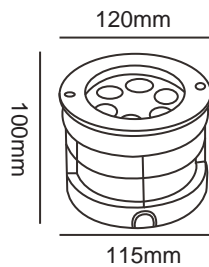


TECHNICAL PARAMETER

Model:UG3002
 Rated power:6W/COB9W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum,Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size (mm):Φ120*H100MM
 Hole Size(mm):Φ115

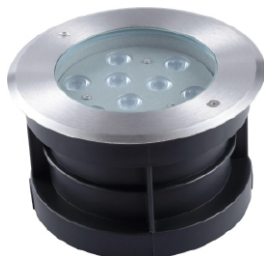


UG3003


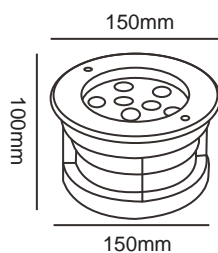


TECHNICAL PARAMETER

Model:UG3003
 Rated power:9W/COB12W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum,Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size (mm):Φ150*H100MM
 Hole Size(mm):Φ150








● 6000K ● 5000K ● 4000K ● 3000K ● 2700K

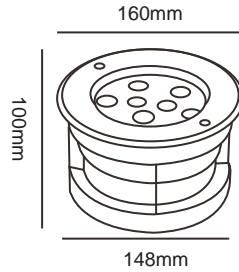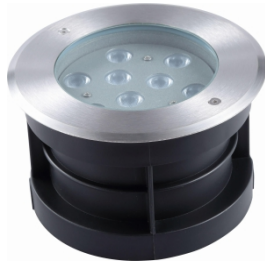

UG3004

TECHNICAL PARAMETER




Model:UG3004
 Rated power:9*2W/12W/COB20W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size(mm):Φ160*H100MM
 Hole Size(mm):Φ148

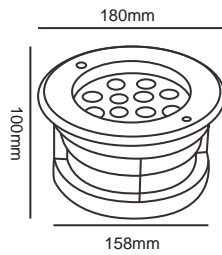

UG3005

TECHNICAL PARAMETER

Model:UG3005
 Rated power:12*2W/12W/18W/COB25W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size(mm):Φ180*H100MM
 Hole Size(mm):Φ158

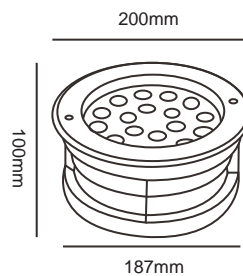


UG3006

TECHNICAL PARAMETER





Model:UG3006
 Rated power:18*2W/24W/COB30W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size(mm):Φ200*H100MM
 Hole Size(mm):Φ187



● 6000K ● 5000K ● 4000K ● 3000K ● 2700K

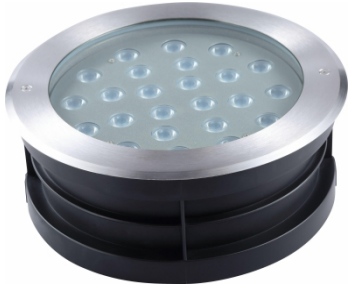

UG3007

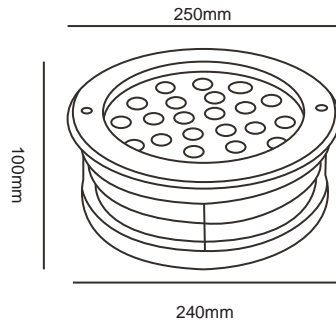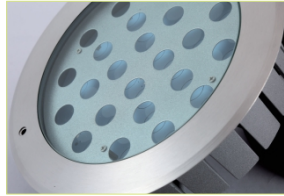


TECHNICAL PARAMETER

Model:UG3007
 Rated power:24*2W/36W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum,Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size (mm):Φ250*H100MM
 Hole Size(mm):Φ240



UG3008

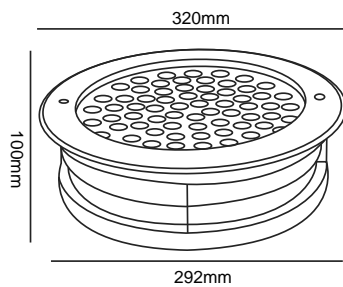

TECHNICAL PARAMETER

Model UG3008
 Rated power:26*2W/54W/72W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum,Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size (mm):Φ320*H100MM
 Hole Size(mm):Φ292



Adjustable LED Underground Light


● 6000K ● 5000K ● 4000K ● 3000K ● 2700K




UG1011

TECHNICAL PARAMETER

Model: UG1011
 Rated power: 3*2W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size(mm): Φ100*H80MM
 Hole Size(mm): Φ95
 Adjustable Angle: ± 25° -30°

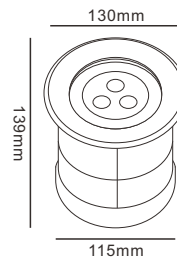

UG1012

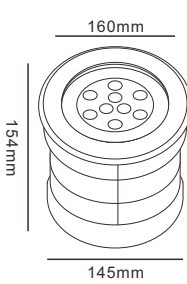

TECHNICAL PARAMETER

Model: UG1012
 Rated power: 9*2W/9W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size(mm): Φ150*H100MM
 Hole Size(mm): Φ150
 Adjustable Angle: ± 25° -30°




Adjustable LED Underground Light

● 6000K ● 5000K ● 4000K ● 3000K ● 2700K



UG1013

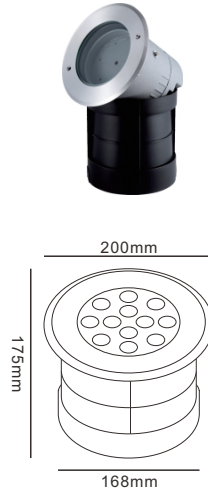

TECHNICAL PARAMETER



Model: UG1013
 Rated power: 12*2W18W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size(mm): Φ180*H100MM
 Hole Size(mm): Φ158
 Adjustable Angle: ± 25° -30°



UG1014

TECHNICAL PARAMETER





Model: UG1014
 Rated power: 36W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size(mm): Φ150*H100MM
 Hole Size(mm): Φ240
 Adjustable Angle: ± 25° -30°

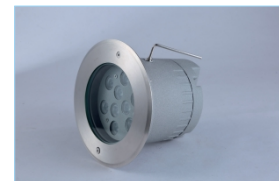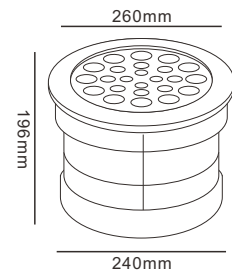

LED Wall Light

6000K 5000K 4000K 3000K 2700K


- 12/24V DC
- III
- 100/240V AC
- IK08
- IP65
- CE
- RoHS
- UL

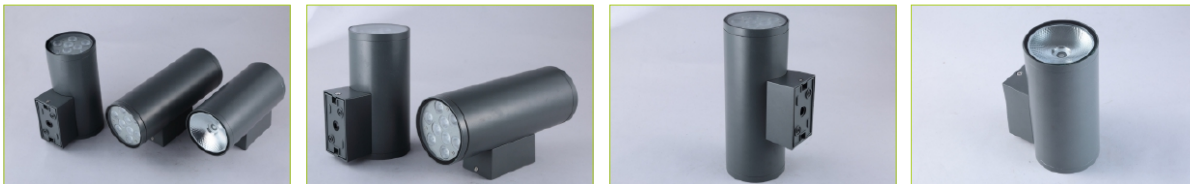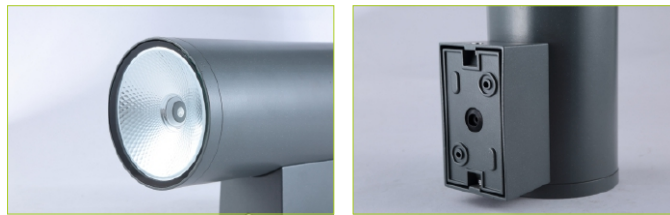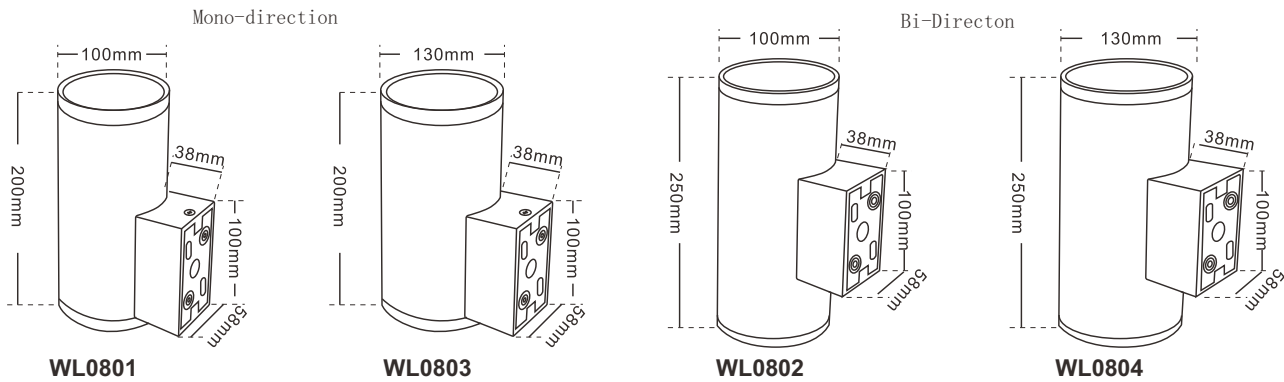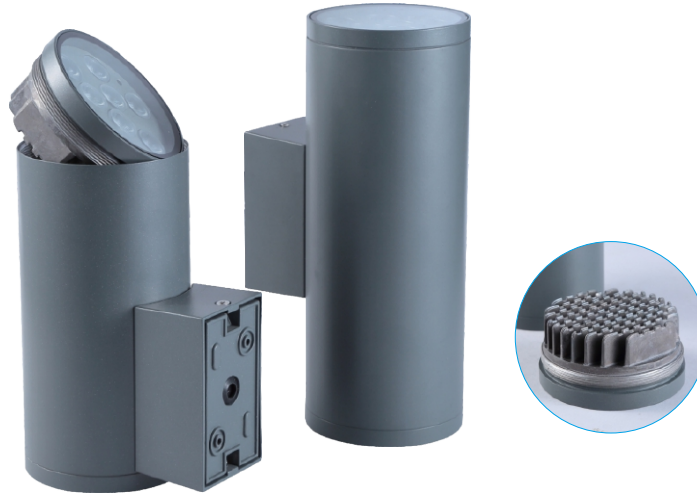

TECHNICAL PARAMETER



Model	Rated power	Chip	CCT	Material	Input Voltage	Angle(Lens)	Size (mm)
ML0801	9W/COB12W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Stainless steel Cover, Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	Φ100*200mm
ML0802	9W/COB12W*2	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Stainless steel Cover, Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	Φ100*250mm
ML0803	12W/18W COB24W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Stainless steel Cover, Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	Φ130*200mm
ML0804	12W/18W COB24W*2	CREE/Bridgelux	30 00K/4000K 6000K/R/G/B	Stainless steel Cover, Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	Φ130*250mm

LED Wall Light



● 6000K ● 5000K ● 4000K ● 3000K ● 2700K

WL0701





TECHNICAL PARAMETER


Model: WL0701
 Rated power: 4W/4*2W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60° /COB10° /20° /30°
 Size(mm): 65*65*65mm



WL0702

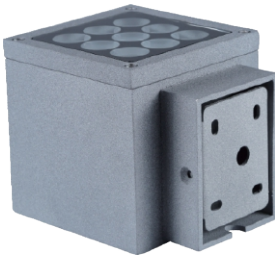

WL0703






TECHNICAL PARAMETER

Model: WL0702/03
 Rated power: 5*1.5W/9*1.5W/9*2W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60° /COB10° /20° /30°
 Size(mm): 95*95*100mm



WL0704

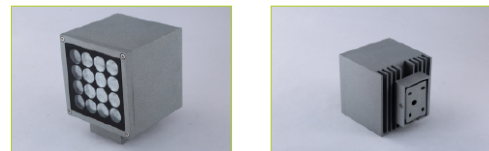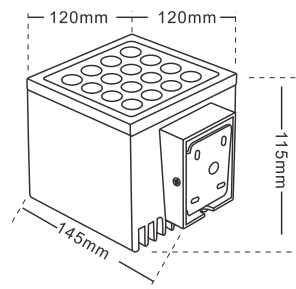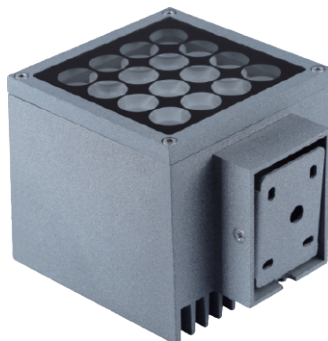

TECHNICAL PARAMETER


Model: WL0704
 Rated power: 12*1.5W/16*1.5W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60° /COB10° /20° /30°
 Size(mm): 120*120*115mm




LED Wall Light

● 6000K ● 5000K ● 4000K ● 3000K ● 2700K

WL0705

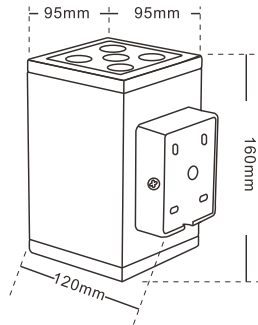

WL0706

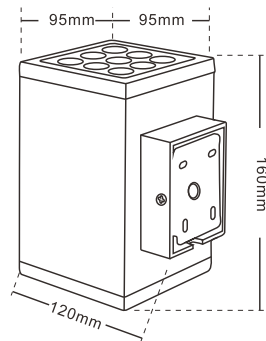


TECHNICAL PARAMETER

Model: WL0705/06
 Rated power: (5*1.5W/9W*1.5)*2
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60° /COB10° /20° /30°
 Size(mm): 95*95*160mm



WL0707

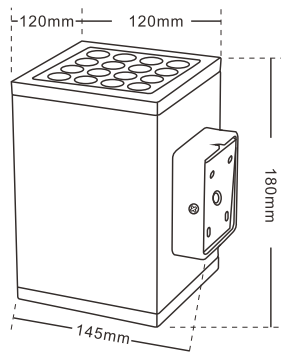

TECHNICAL PARAMETER

Model: WL0707
 Rated power: (12*1.5W/16W*1.5)*2
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60° /COB10° /20° /30°
 Size(mm): 120*120*180mm




LED Ceiling Floodlight

6000K 5000K 4000K 3000K 2700K



FP0501

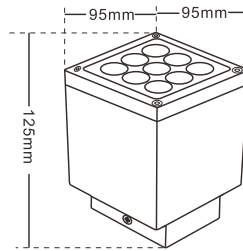


TECHNICAL PARAMETER

Model: FP0501
 Rated power: 5*2W/9W/9*2W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size(mm): 95*95*125mm



FP0502




TECHNICAL PARAMETER

Model: FP0502
 Rated power: 12*1.5W/16*1.5W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size(mm): 120*120*145mm



● 6000K ● 5000K ● 4000K ● 3000K ● 2700K

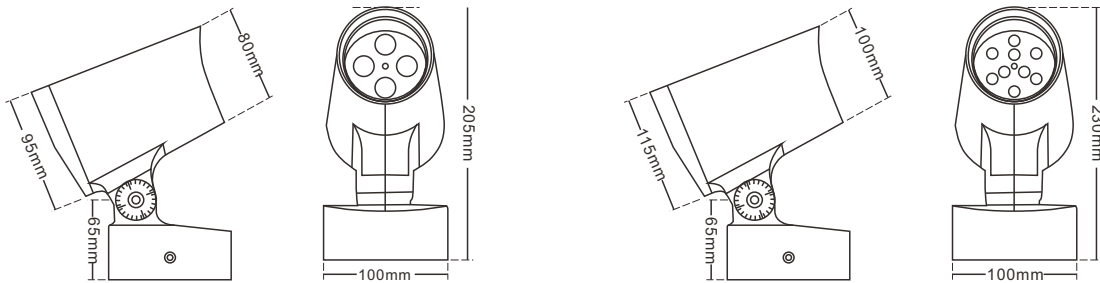

TECHNICAL PARAMETER



Model	Rated power	Chip	CCT	Material	Input Voltage	Angle (Lens)	Size (mm)
BP1101	COB15W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	Φ80*205mm
BP1102	3*3W/4*3W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	Φ80*205mm
BP1103	9*3W/COB30W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	Φ100*230mm




● 6000K ● 5000K ● 4000K ● 3000K ● 2700K



BP1104



BP1105

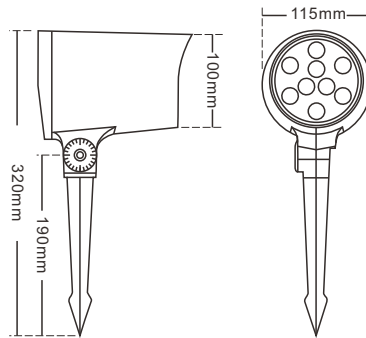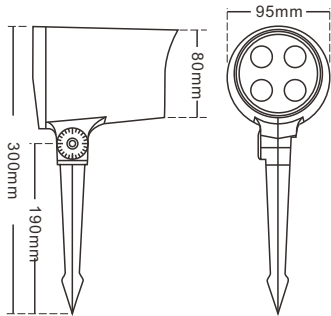


TECHNICAL PARAMETER

Model	Rated power	Chip	CCT	Material	Input Voltage	Angle(Lens)	Size (mm)
BP1104	3*3W/4*3 COB15W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	80*300mm
BP1105	9*3W/COB30W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	100*320mm
BP1106	3*3W/9*3WC OB10-15W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60° COB10°/20°/30°/90°	80*230mm



BP1106

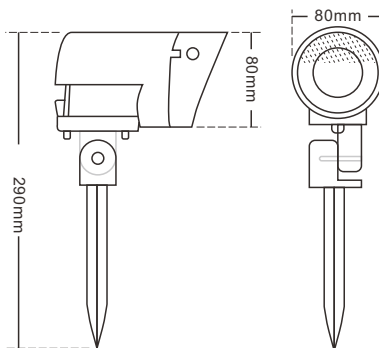

LED Floodlight

6000K 5000K 4000K 3000K 2700K



- 12/24V DC
- III
- 100/240V AC
- IK08
- IP65
- CE
- RoHS
- UL







FP0401



FP0402



FP0403

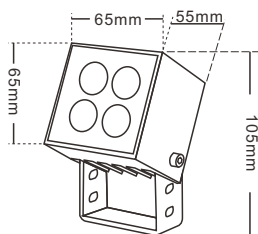

TECHNICAL PARAMETER

Model:FP0401/02/03
 Rated power:4*2W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size(mm):65*65*95

LED Floodlight

● 6000K ● 5000K ● 4000K ● 3000K ● 2700K



- 12/24V DC
- III
- 100/240V AC
- IK08
- IP65
- CE
- RoHS
- UL

FP0404




FP0405

FP0406

FP0407





FP0408

FP0409

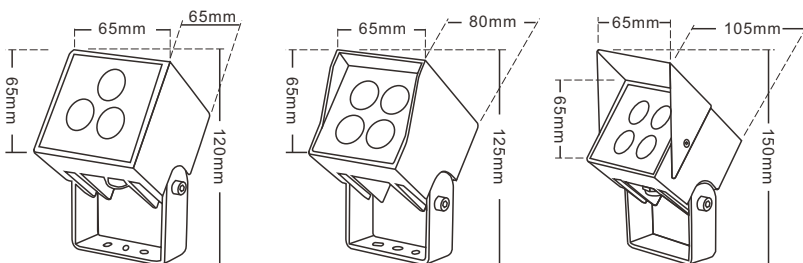

TECHNICAL PARAMETER

Model:FP0404/05/06/07/08/09
 Rated power:4*2W/COB7-10W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60° /COB40°
 Size(mm):65*65



LED Floodlight

6000K 5000K 4000K 3000K 2700K






FP0410



FP0411




FP0412



TECHNICAL PARAMETER

Model: FP0410/11/12
 Rated power:9*2W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size(mm):90*90*125mm






FP0413




FP0414

TECHNICAL PARAMETER

Model: FP0413/14
 Rated power:16*1.5W/16*2W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°
 Size(mm):155*155mm



LED Floodlight



● 6000K ● 5000K ● 4000K ● 3000K ● 2700K



FP0601



FP0602









FP0603



FP0603



FP0604

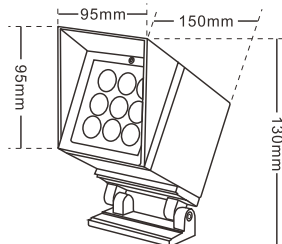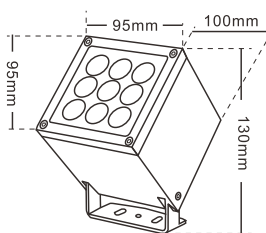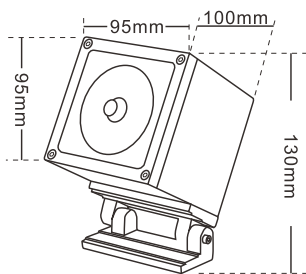


TECHNICAL PARAMETER

Model: FP0601/02/03/04/05
 Rated power: 4*3W/5*1.5W/9W/9*2W/COB10-15W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size(mm): 95*95*130mm



LED Floodlight



6000K 5000K 4000K 3000K 2700K



FP0606





FP0607



FP0608



FP0609

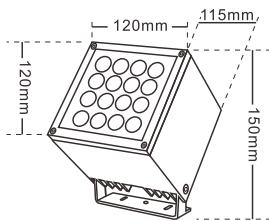

TECHNICAL PARAMETER

Model: FP0606/07/08/09
 Rated power: 12*1W/12*1.5W/16*1W/16*1.5W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size (mm): 120*120*150mm








FP0610



FP0611



FP0612



TECHNICAL PARAMETER


Model: FP0610/11/12
 Rated power: 24W/24*2W/9*3W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60°
 Size (mm): 150*150*180mm




● 6000K ● 5000K ● 4000K ● 3000K ● 2700K




BP1201




BP1204




BP1202



BP1205

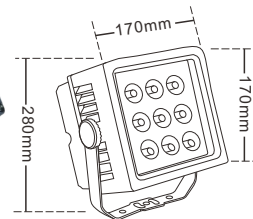

BP1203



TECHNICAL PARAMETER

Model	Rated power	Chip	CCT	Material	Input Voltage	Angle(Lens)	Size (mm)
BP1201	4*3W/9*2W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°45°//60°	95*W95*H125mm
BP1202	4*3W/9*2W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°45°//60°	95*W95*H125mm
BP1203	3*5W/16*2W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°45°//60°	135*W135*H190mm
BP1204	9*3W/24*2W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°45°//60°	170*W170*H230mm
BP1205	9*3W/24*2W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°45°//60°	170*W170*H230mm

● 6000K ● 5000K ● 4000K ● 3000K ● 2700K



BP1603









BP1604



BP1601C



BP1601

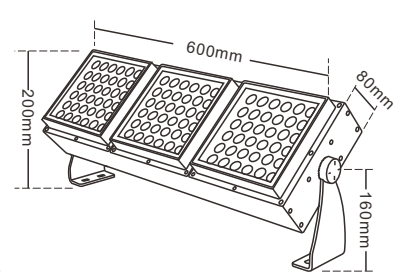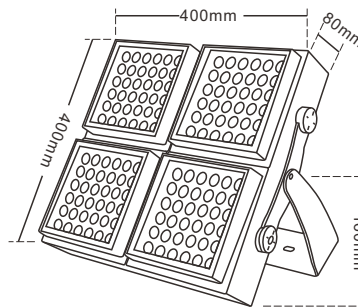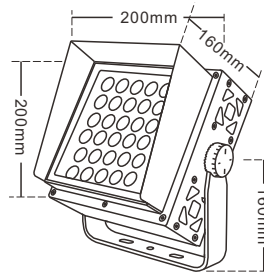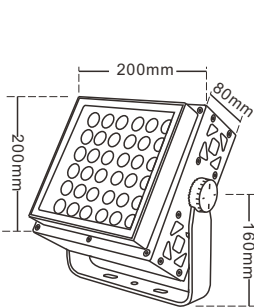


TECHNICAL PARAMETER


Model	Rated power	Chip	CCT	Material	Input Voltage	Angle(Lens)	Size (mm)
BP1601	36*2W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	200*200mm
BP1601C	36*2W*2	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	\
BP1603	36*2W*3	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	\
BP1604	36*2W*4	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	\

LED Floodlight


6000K 5000K 4000K 3000K 2700K




BP0901



BP0902



BP0903

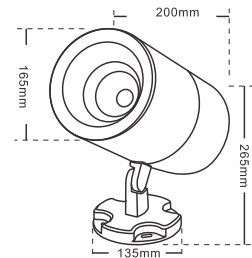


BP0904

TECHNICAL PARAMETER


Model	Rated power	Chip	CCT	Material	Input Voltage	Angle(Lens)	Size (mm)
BP0901	9W/10W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Stainless steel Cover, Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	COB24°/60°	Φ90*180*190mm
BP0902	15W/20W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Stainless steel Cover, Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	COB24°/60°	Φ110*180*210mm
BP0903	24W/30W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Stainless steel Cover, Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	COB24°/60°	Φ145*200*245mm
BP0904	40W/50W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Stainless steel Cover, Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	COB24°/60°	Φ165*200*265mm



BP0905

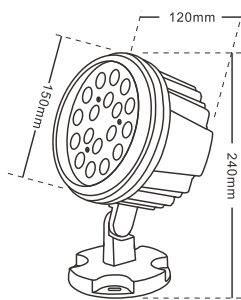

BP0906

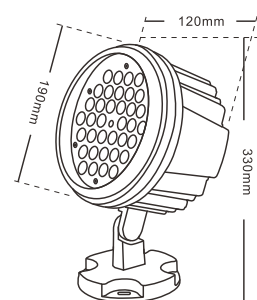


TECHNICAL PARAMETER


Model: BP0905
 Rated power: 18*1.5W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60° /COB10° /20° /30° /90°
 Size(mm): Φ 150*H240mm



TECHNICAL PARAMETER

Model: BP0906
 Rated power: 38*1.5W
 Chip: CREE/Bridgelux
 CCT: 3000K/4000K/6000K/R/G/B
 Material: Stainless steel Cover, Aluminum, Tempered glass
 Input Voltage: 12V/24V/100-240V 50-60Hz
 Angle(Lens): 15° /30° /45° /60° /COB10° /20° /30° /90°
 Size(mm): Φ 190*H330mm





BP1501



TECHNICAL PARAMETER

Model:BP1501
 Rated power:COB30W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Aluminum,Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):COB18°/38°
 Size(mm): Φ150*180*145mm





BP1502




TECHNICAL PARAMETER


Model:BP1502
 Rated power:12*2W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Stainless steel Cover,Aluminum,Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15°/30°/45°/60°
 Size(mm): Φ150*180*145mm

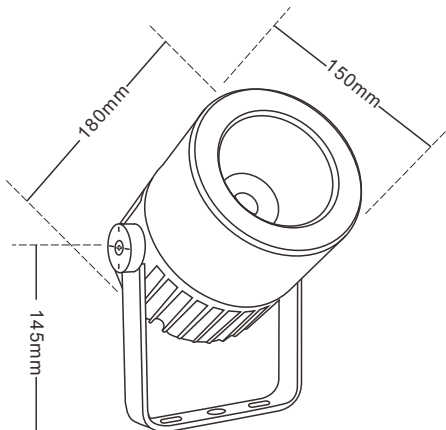


● 6000K ● 5000K ● 4000K ● 3000K ● 2700K




BP1301



BP1302




BP1303




TECHNICAL PARAMETER




Model	Rated power	Chip	CCT	Material	Input Voltage	Angle(Lens)	Size (mm)
BP1301	9W/12W/18W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	Φ170*W130mm
BP1302	18W/24W/36W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	Φ210*W133mm
BP1303	54W/60W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	Φ290*W150mm




BP1401




BP1402



BP1403



BP1404




TECHNICAL PARAMETER




Model	Rated power	Chip	CCT	Material	Input Voltage	Angle(Lens)	Size (mm)
BP1401	9*2W/12W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	Φ130*170mm
BP1402	12*2W/18W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	Φ150*180mm
BP1403	18*2W/24W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	Φ180*210mm
BP1404	24*2W/36W	CREE/Bridgelux	3000K/4000K 6000K/R/G/B	Aluminum, Tempered glass	12V/24V/100-240V 50-60Hz	15°/30°/45°/60°	Φ230*260mm



● 6000K ● 5000K ● 4000K ● 3000K ● 2700K

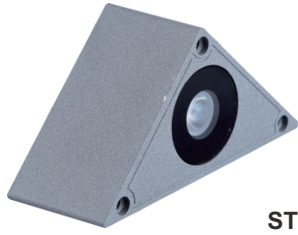


ST0101

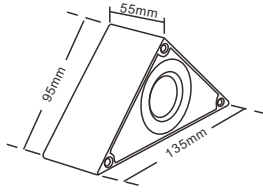


TECHNICAL PARAMETER

Model:ST0101
 Size(mm):95*95*135*55
 Rated power:1-3W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°





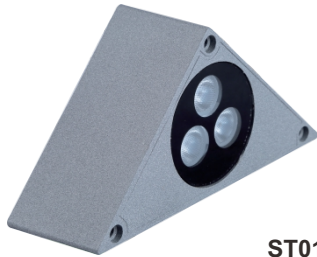


ST0102

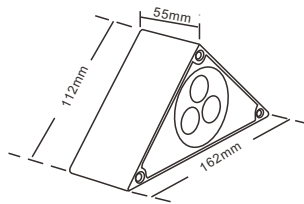


TECHNICAL PARAMETER

Model:ST0102
 Size(mm):112*112*162*55
 Rated power:3W/3*2W/3*3W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°




ST0103




TECHNICAL PARAMETER

Model:ST0103
 Size(mm):80*80*50
 Rated power:1-3W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°




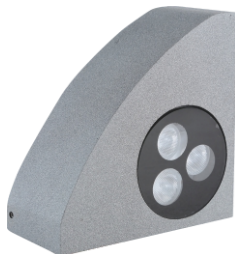


ST0104



TECHNICAL PARAMETER

Model:ST0104
 Size(mm):110*110*50
 Rated power:3W/3*2W/3*3W
 Chip:CREE/Bridgelux
 CCT:3000K/4000K/6000K/R/G/B
 Material:Aluminum, Tempered glass
 Input Voltage:12V/24V/100-240V 50-60Hz
 Angle(Lens):15° /30° /45° /60°

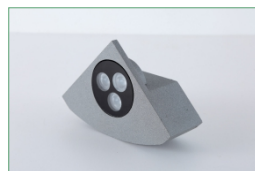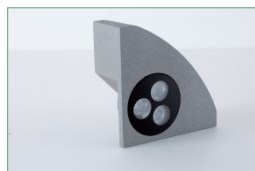

THANK YOU

More products in www.solucionled.com

Nelux HK international,Ltd., which is established in 2010 by European shareholders has been focusing on the researching, designing, molds and production of the top level commercial lighting products.
Customised Lighting Products

Nelux (HK) international,ltd

Address Head Office

**18 harbour road, central plaza
32/F 3208 office, wanchai, HK**

Address Assembling Workshop

**22 Kin Fat St. 11th Floor, Sun Hing Industrial Building,
Tuen Mun, Hong Kong, China**