

Our OUTDOOR products are made from Solid passivated Anodized aluminum , aluminum and die-casting depending on references. and trim stainless steel.

Led Driver Khün, Xz, Osram, Philips.

Input Voltage Multivoltage and 220-240VAC/50-60Hz

WALL RECESSED SERIES




WL10540 4W

WL18243 8W

WL10540 6W

WL7035 1W, 3W

WL16555 3W

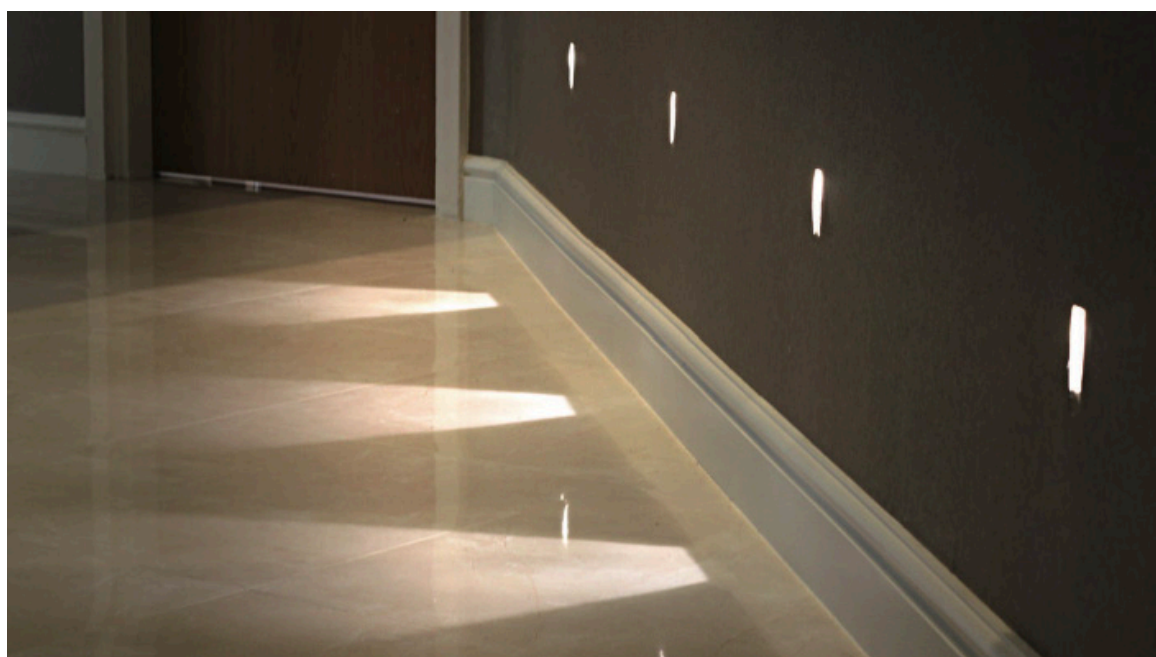


COMMERCIAL AND RESIDENTIAL OUTDOOR, series Wall Recessed Light, reference WL16555 3W, high performance for your stairways, staircases, outdoor terrace,...

WL10540



GENERAL DATA

Power	4W
Led type	30pcs SMD2835 LED
Lumens	100~120lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	120°
Dimension	L105*W81*H40mm
Cut out	L100*W58*H50mm
Net weight	0.369kg
Warranty	3 years

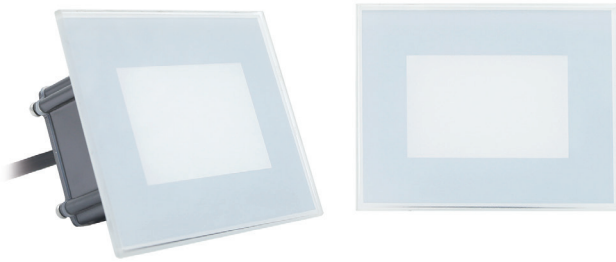


MAIN DATA

IP rating	IP65
IK rating	IK06
Housing material	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard, painted in white as options
Trim	Tempered glass painted in milky white
Glass	Tempered Glass.T=4mm
Loading capacity	320 kgs
Cable gland	PG7 IP67
Gasket	Flat PMQ silicone seal
Accessories	mounting box aluminum

ELECTRICAL DATA

Input voltage	AC100~240V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer

WL10540

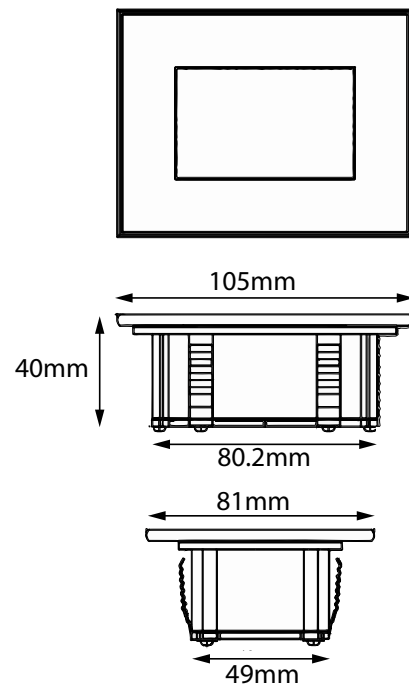

WL18243






GENERAL DATA

Power	8W
Led type	42pcs SMD2835 LED
Lumens	190~210lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	120°
Dimension	L182*W81*H43mm
Cut out	L170*W59*H55mm
Net weight	0.373kg
Warranty	3 years



MAIN DATA

IP rating	IP65
IK rating	IK06
Housing material	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard, painted in white as options
Trim	Tempered glass painted in milky white
Glass	Tempered Glass.T=4mm
Loading capacity	320 kgs
Cable gland	PG7 IP67
Gasket	Flat PMQ silicone seal
Accessories	mounting box aluminum

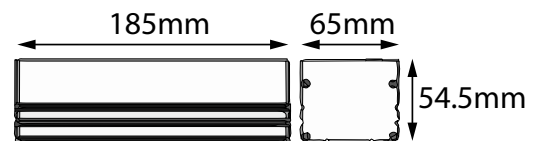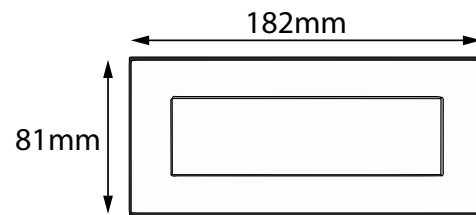

ELECTRICAL DATA

Input voltage	AC100~240V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer



WL10540




GENERAL DATA

Power	6W
Led type	8pcs CREE XTE
Lumens	95~120lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	120°
Dimension	L105*W81*H40mm
Cut out	100*58*50mm
Net weight	0.369kg
Warranty	3 years



MAIN DATA


IP rating	IP65
IK rating	IK06
Housing material	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard.
Trim	Tempered glass painted in black
Glass	Tempered Glass.T=4mm
Loading capacity	320 kgs
Cable gland	PG7 IP67
Gasket	Flat PMQ silicone seal
Accessories	Mounting Sleeve aluminum

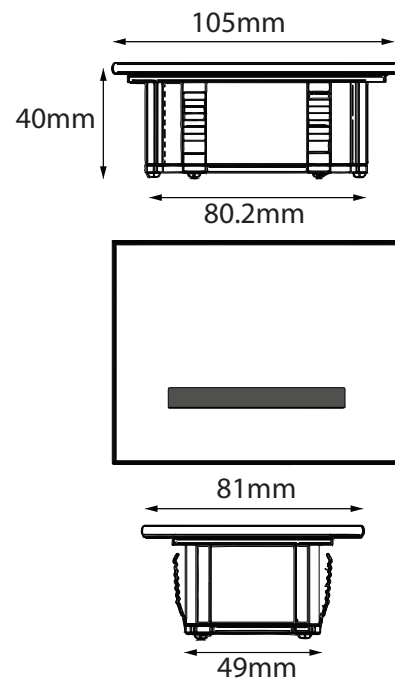

ELECTRICAL DATA


Input voltage	AC100-240V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer

WL7035






GENERAL DATA

Power	1W, and 3W as an option
Led type	1pcs CREE XPE led
Lumens	75~80lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	30°
Dimension	Ø70*H34.5mm
Cut out	62mm
Net weight	0.225kg
Warranty	3 years

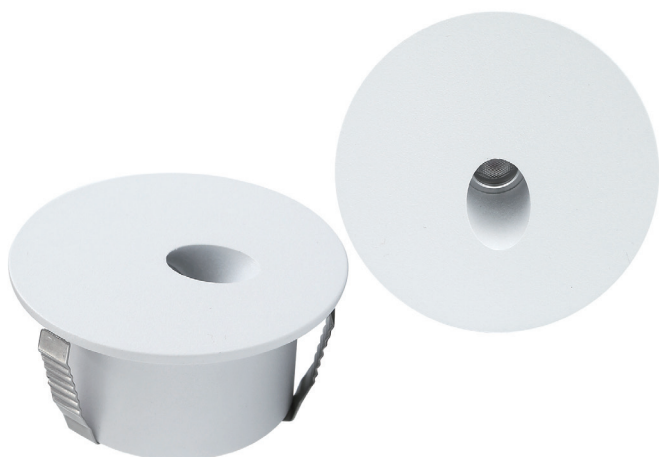

MAIN DATA

IP rating	IP65
IK rating	IK06
Housing material	Polished chrome Aluminium/Satin Nickel Aluminium/Powder coated painting in white color Aluminium
Protection finishing	Polished chrome/Satin Nickel/ Powder coated painting in white color
Trim	Polished chrome Aluminium/Satin Nickel Aluminium/Powder coated painting in white color Aluminium
Glass	Tempered Glass
Loading capacity	320 kgs
Cable gland	PG7 IP67
Gasket	Ring PMQ silicone seal
Accessories	Mounting Sleeve Anti-corrosion PVC. Grey.

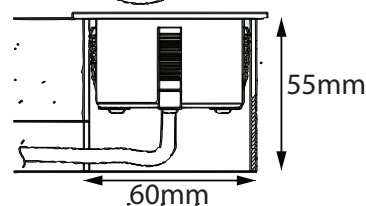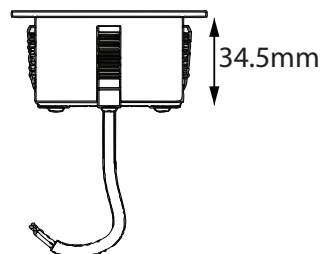

ELECTRICAL DATA

Input voltage DC12V/DC24V
 Insulation class Class III
 Cable 1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
 Driver Low voltage constant current output ,excluding the transformer. (With separately driver for options)



Polished chrome aluminium



Satin nickel



WL16555





GENERAL DATA

Power	3W
Led type	1 pcs CREE XPE led
Lumens	110~130lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	30°
Dimension	L165*W55*H42mm
Cut out	147*40*45mm
Net weight	0.365kg
Warranty	3 years



MAIN DATA

IP rating	IP67
IK rating	IK06
Housing material	Polished chrome Aluminium/Satin Nickel Aluminium/Powder coated painting in white color Aluminium
Protection finishing	Polished chrome/Satin Nickel/ Powder coated painting in white color
Trim	Polished chrome Aluminium/Satin Nickel Aluminium/Powder coated painting in white color Aluminium
Glass	Tempered Glass
Loading capacity	320 kgs
Cable gland	IP67
Gasket	Ring PMQ silicone seal

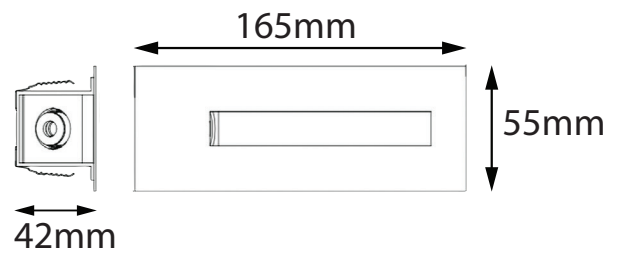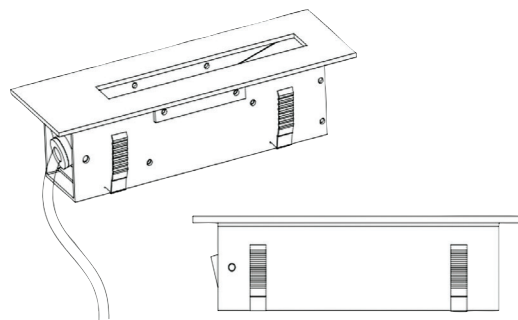

ELECTRICAL DATA

Input voltage DC12V/DC24V
 Insulation class Class III
 Cable 1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
 Driver Low voltage constant current output ,excluding the transformer. (With separately driver for options)



Powder coating in white



Satin nickel

WALL RECESSED SERIES